

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 836 183 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
08.05.2002 Bulletin 2002/19

(51) Int Cl.7: **G11B 7/28**

(21) Application number: **97117280.4**

(22) Date of filing: **06.10.1997**

(54) Recording and reproducing apparatus and recording and reproducing method

Aufnahme- und Wiedergabevorrichtung sowie -verfahren

Méthode et appareil pour l'enregistrement et la reproduction

(84) Designated Contracting States:
DE FR GB

• **Tanaka, Yozo**
Shinagawa-ku, Tokyo (JP)

(30) Priority: **09.10.1996 JP 26898496**

(74) Representative: **Körber, Wolfhart, Dr. rer.nat. et al**
Patentanwälte
Mitscherlich & Partner,
Sonnenstrasse 33
80331 München (DE)

(43) Date of publication of application:
15.04.1998 Bulletin 1998/16

(56) References cited:
EP-A- 0 254 254 EP-A- 0 449 607
EP-A- 0 612 067 US-A- 5 097 461
US-A- 5 301 181 US-A- 5 349 477

(73) Proprietor: **SONY CORPORATION**
Tokyo (JP)

• **PATENT ABSTRACTS OF JAPAN** vol. 015, no.
305 (P-1234), 5 August 1991 & JP 03 108157 A
(VICTOR CO OF JAPAN LTD), 8 May 1991,
• **PATENT ABSTRACTS OF JAPAN** vol. 016, no.
457 (P-1426), 22 September 1992 & JP 04 162282
A (MATSUSHITA ELECTRIC IND CO LTD), 5 June
1992,

(72) Inventors:

- **Sakamoto, Hiroshi**
Shinagawa-ku, Tokyo (JP)
- **Hisamatsu, Nobuaki**
Shinagawa-ku, Tokyo (JP)
- **Obita, Tomohiro**
Shinagawa-ku, Tokyo (JP)
- **Yamaguchi, Takahiro**
Shinagawa-ku, Tokyo (JP)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**BACKGROUND OF THE INVENTION****1. Field of the Invention**

[0001] This invention relates to a recording and reproducing apparatus and a recording and reproducing method. Particularly, it relates to a recording and reproducing apparatus and a recording and reproducing method in which output signals from a reproducing unit are supplied to a recording unit for performing recording operation.

2. Description of Related Art

[0002] As media for recording information signals, such as, audio signals, optical discs which are high-density recording media have been broadly used. The optical discs are randomly accessible, have small diameter and thickness, and are housed in cartridges. Therefore, the optical discs are characterized by their easiness in handling. Such optical discs are roughly classified into optical discs capable of repeated recording/reproduction, such as, magneto-optical discs and phase-changed type optical discs, and optical discs for reproduction only, such as, so-called compact discs.

[0003] By using the above-mentioned recordable optical disc, since information signals like audio signals are recorded as digital signals, reproduced sounds of high quality may be obtained. In addition, editing and duplication may be carried out easily without substantially deteriorating the sound quality.

[0004] Meanwhile, as reproducing apparatuses for the so-called compact discs (CDs) as described above, various reproducing apparatuses which have a media exchange mechanism (changer) capable of housing a plurality of discs in a predetermined housing section, then taking out the discs in an arbitrary order, and continuously reproducing the discs have been proposed. However, with respect to recording apparatuses for carrying out recording on recordable optical discs, few of these recording apparatuses currently have the changer function.

[0005] Therefore, in sequentially recording information signals like audio signals onto a plurality of disc-shaped recording media, the disc-shaped recording media must be sequentially inserted one by one into a recording apparatus by manual operation. It has been difficult to carry out such editing operation over a long period of time.

[0006] Thus, a recording and reproducing apparatus has been demanded which is capable of selecting information signals like audio signals to be recorded on each disc-shaped recording medium and designating in advance the disc-shaped recording medium for recording such information signals and which has a media exchange mechanism so that it is not necessary to se-

quentially insert the media one by one into the recording apparatus by manual operation.

[0007] EP 0 254 254 discloses a compact disc reproducing apparatus wherein in order to record an information from a compact disc apparatus to an automatic reversing cassette tape recorder without any loss of the information, the compact disc player and the cassette tape recorder are synchronously started by a reproducing start control means which makes the compact disc player and when the cassette tape comes to one end a tape end detection means issues a pulse which makes the compact disc player pause for a predetermined time period (e.g. 1-2 sec.) which is longer than the time period for reversing the cassette tape recorder, and thereby the compact disc player starts reproduction of information after reverse direction start of the cassette tape recorder, to prevent a loss of information reproduced by the compact disc player during the tape reversing.

20 SUMMARY OF THE INVENTION

[0008] It is therefore an object of the present invention to provide recording and reproducing apparatus which resolves the above-mentioned problem.

[0009] It is another object of the present invention to provide a recording and reproducing method which resolves the above-mentioned problem.

[0010] It is a further object of the present invention to provide a recording and reproducing apparatus and a recording and reproducing method according to the preambles of independent claims 1 and 11, respectively, wherein a loss of information during the recording and reproducing process is avoided.

[0011] The invention is defined in the independent claims. Further developments are set forth in the dependent claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] Fig.1 is a block diagram showing an exemplary structure of a disc recording and/or reproducing apparatus according to an embodiment of this invention.

[0013] Fig.2 is a view showing an example of appearance and an operating section of the disc recording and/or reproducing apparatus according to the embodiment of this invention.

[0014] Figs.3(a) and 3(b) are perspective views showing a disc cartridge, from upper and lower sides thereof, used in the disc recording and/or reproducing apparatus according to the embodiment of this invention.

[0015] Fig.4 is a view showing an exemplary structure of essential portions of the disc recording and/or reproducing apparatus.

[0016] Fig.5 is a view showing an example of an operating section of a disc recording/reproducing unit of the disc recording and/or reproducing apparatus.

[0017] Fig.6 is a view showing an example of a disc housing section of the disc recording/reproducing unit

of the disc recording and/or reproducing apparatus.

[0018] Figs.7(a) and 7(b) are views for explaining operation of a "5 to 5" mode in the disc recording and/or reproducing apparatus.

[0019] Fig.8 is a flowchart showing an example of processing procedures of the "5 to 5" mode in the disc recording and/or reproducing apparatus.

[0020] Figs.9(a) and 9(b) are views for explaining operation of a "1 to 5" mode in the disc recording and/or reproducing apparatus.

[0021] Fig.10 is a flowchart showing an example of processing procedures of the "1 to 5" mode in the disc recording and/or reproducing apparatus.

[0022] Figs.11(a) and 11(b) are views for explaining operation of a "5 to 1" mode in the disc recording and/or reproducing apparatus.

DESCRIPTION OF THE INVENTION

[0023] The recording and reproducing apparatus according to the present invention will now be described in detail with reference to the drawings. As a recording and reproducing apparatus according to an embodiment of the present invention, a recording and/or reproducing apparatus for recording information signals reproduced from an optical disc of reproduction-only type such as a so-called compact disc (hereinafter referred to simply as an optical disc) onto a recordable optical disc such as a magneto-optical disc (hereinafter referred to as a recordable disc) is explained.

[0024] Fig.1 is a block diagram showing an exemplary structure of essential portions of the disc recording and/or reproducing apparatus according to the embodiment of the present invention.

[0025] This disc recording and/or reproducing apparatus includes an amplifier/control unit 110, a disc reproducing unit 120, and a disc recording/reproducing unit 130. These units transmit and receive various types of control information to and from one another via bus lines. As a matter of course, information signals like audio signals are transmitted and received between the units.

[0026] The amplifier/control unit 110 has means for supplying electric power to the entire disc recording and/or reproducing apparatus and controlling the entire apparatus. The amplifier/control unit 110 also has a function to amplify information signals like audio signals outputted from the disc reproducing unit 120 or the disc recording/reproducing unit 130 as later described, and supply the amplified information signals to a speaker, not shown. This amplifier/control unit 110 includes a control circuit 111 which is means for transmitting and receiving control signals to and from each unit of the disc recording and/or reproducing apparatus via a bus line to control the entire apparatus, an operating section 112 having a switch, a dial and the like for indicating operation to the control circuit 111, and a display section 113 having a liquid crystal display or the like for display-

ing the operating state of each unit of the apparatus based on the information from the control circuit 111.

[0027] The disc reproducing unit 120 has a function to reproduce information signals like audio signals from plural optical discs. The disc reproducing unit 120 includes a control circuit 121 which is means for transmitting and receiving control signals to and from each unit of the disc recording and/or reproducing apparatus via a bus line to control the operation of the disc reproducing unit 120, and a disc exchange and reproducing section 124 for reproducing information signals like audio signals from plural optical discs. The disc exchange and reproducing section 124 further includes a disc housing section 124a as means for housing plural optical discs having information signals recorded thereon, a disc carrier section 124b as means for loading and chucking the optical disc housed in the disc housing section 124a to a spindle on the basis of the control signal from the control circuit 121 and also as means for unloading the chucked optical disc, and a reproducing section 124c as means for reproducing information signals from the optical disc carried and chucked to the spindle.

[0028] The disc recording/reproducing unit 130 has a function to record and reproduce information signals like audio signals with respect to plural recordable optical discs. This disc recording/reproducing unit 130 includes a control circuit 131 as means for transmitting and receiving control signals to and from each unit of the disc recording and/or reproducing apparatus via a bus line to control the operation of the disc recording/reproducing unit 130, an operating switch group 132 having a switch, a dial and the like for indicating operation to the control circuit 131, a display section 133 having a liquid crystal display for displaying the operating state of each unit of the apparatus based on the information from the control circuit 131, and a recording/reproducing section 134 for recording/reproducing information signals like audio signals onto/from the plural recordable discs. The recording/reproducing section 134 further includes a housing section 134a for housing the plural recordable discs on which information signals are to be recorded, a carrier section 134b as means for loading and chucking the recordable disc housed in the housing section 134a to a spindle on the basis of the control signal from the control circuit 131 and also as means for unloading the chucked recordable disc, and a recording/reproducing section 134c as means for recording and reproducing information signals onto and from the recordable disc carried and chucked to the spindle.

[0029] In the disc recording and/or reproducing apparatus having the above-described structure according to the present invention, the disc reproducing unit 120 receives a recording preparation completion signal indicating completion of preparation for recording supplied from the disc recording/reproducing unit 130, and starts reproducing the optical disc. The disc recording/reproducing unit 130 records information signals reproduced from the optical disc and supplied from the reproducing

unit 120 onto the recordable disc. In this case, as the information signals reproduced from the disc and transmitted to the disc recording/reproducing unit 130, for example, signals between musical pieces are used. For example, the recording preparation completion signal outputted from the recording/reproducing unit 130 is outputted after loading the recordable disc onto the recording/reproducing unit 130, reading the table of contents information of the recordable disc, accessing a recording start point of the recordable disc by a head, and setting a recording standby state.

[0030] The amplifier/control unit 110, the disc reproducing unit 120 and the disc recording/reproducing unit 130 may have a structure of so-called component stereo system in which devices housed in individual casings are combined, or may have a structure such that the units are housed and integrated in a single casing.

[0031] Fig.2 is a view showing an example of appearance of the disc recording and/or reproducing apparatus having the structure as shown in Fig.1. From the top, the disc reproducing unit 120, the amplifier/control unit 110, and the disc recording/reproducing unit 130 are shown. The amplifier/control unit 110 includes the control circuit 111 for controlling the disc reproducing unit 120 and the disc recording/reproducing unit 130, as described above. The amplifier/control unit 110 also includes the operating section 112 provided with various dials and keys for performing various inputs to the control circuit 111, and the display section 113 including a large-size liquid crystal panel or a fluorescent indicator panel for displaying the operation of the entire disc recording and/or reproducing apparatus via the control circuit 111.

[0032] This disc recording and/or reproducing apparatus has the function to record audio signals obtained by reproducing the optical disc at the disc reproducing unit 120 onto the disc-shaped recording medium at the disc recording/reproducing unit 130. In this case, so-called dubbing may be carried out in which the reproduction start timing for the optical disc and the recording start timing for the disc-shaped recording medium are caused to coincide with each other.

[0033] The disc recording and/or reproducing apparatus has the following four types of modes as dubbing modes:

- (1) "normal" mode;
- (2) "5 to 5" mode;
- (3) "1 to 5" mode; and
- (4) "5 to 1" mode.

These modes are selected by a user who operates a selector dial of the operating section 112 of the amplifier/control unit 110.

[0034] The above-mentioned (2) "5 to 5" mode and (4) "5 to 1" mode are reproduction modes which may be selected in a disc reproducing apparatus having a medium exchange mechanism (changer) for reproducing

so-called compact discs.

[0035] The above-mentioned (1) "normal" mode is the simplest mode in which information signals reproduced by the disc reproducing apparatus are sequentially recorded on the optical disc by the disc recording apparatus. The reproduction mode in the disc reproducing apparatus has been conventionally known, and is exemplified by a "1/ALL" mode for selecting whether to reproduce only one optical disc or to reproduce all the optical discs, a "program" mode for reproducing musical pieces recorded on the optical disc in a predetermined order, or a "random reproduction" mode for reproducing in a random order. In the disc reproducing apparatus having the disc exchange mechanism (changer), there is a mode such that recording is sequentially carried out from five discs to one recording medium.

[0036] The above-mentioned (2) "5 to 5" mode is a mode for recording from five optical discs to five recordable discs. That is, it is a mode such that the contents recorded on the five optical discs housed in the disc housing section 124a of the disc reproducing unit 120 can be recorded onto the five recordable discs housed in the housing section 134a of the disc recording/reproducing unit 130.

[0037] The above-mentioned (3) "1 to 5" mode is a mode for recording from one optical disc to five recordable discs. That is, it is a mode such that the contents recorded on an arbitrary one of up to five optical discs housed in the disc housing section 124a of the disc reproducing unit 120 can be sequentially recorded and duplicated onto each of the five recordable discs housed in the housing section 134a of the disc recording/reproducing unit 130.

[0038] The above-mentioned (4) "5 to 1" mode is a mode for sequentially reproducing only the musical piece on the first track of each of the five optical discs and recording it onto one recordable disc, and this mode is referred to as a "hit parade" mode. That is, it is a mode such that only the contents recorded on an arbitrary track (for example, the first track) of each of up to five optical discs housed in the disc housing section 124a of the disc reproducing unit 120 can be sequentially recorded onto arbitrary one of up to five recordable discs housed in the housing section 134a of the disc recording/reproducing unit 130.

[0039] The operating section 112 of the amplifier/control unit 110 has a selector dial and keys for selecting various menus. Specifically, these keys include a play key (PLAY), a pause key (PAUSE), and a stop key (STOP) for causing the disc reproducing unit 120 and the disc recording/reproducing unit 130 to start, stand by for, and end the reproducing operation, and a rec key for causing the disc recording/reproducing unit 130 to carry out the recording operation.

[0040] To select the "dubbing mode" for duplicating the contents of plural optical discs onto plural recordable discs, or the mode for sequentially recording only the first musical piece of plural optical discs onto one re-

cordable disc as in the above-described "hit parade" mode, the user turns the selector dial to select the mode. When carrying out input setting of more detailed conditions, the user uses cursor keys and an enter/next key for determining input data.

[0041] Prior to specific explanation of the disc recording and/or reproducing apparatus according to the embodiment of the present invention, the recordable disc used in the present invention is now explained.

[0042] Figs.3(a) and 3(b) show a state where a magneto-optical disc as the recordable disc is housed in a disc cartridge. Fig.3(a) is a perspective view showing the disc cartridge from the upper side. Fig.3(b) is a perspective view showing the disc cartridge from the lower side.

[0043] The disc cartridge has a cartridge body 64 which is constituted by joining an upper half 62 and a lower half 63, each being formed by molding synthetic resin into a rectangular shape. A magneto-optical disc 65 is housed in the cartridge body 64.

[0044] The magneto-optical disc 65 used in this embodiment has a diameter of about 64 mm, and a storage capacity for recording audio signals for 74 minutes at maximum.

[0045] On the lower half 63 of the cartridge body 64, as shown in Fig.3(b), a disc table entry opening portion 66 is provided which a disc table of a disc rotation driving mechanism for rotating the magneto-optical disc 65 enters when the disc cartridge 61 is loaded on the disc recording and/or reproducing apparatus. Specifically, this disc table entry opening portion 66 is formed so as to expose, outward, an inner peripheral portion of the magneto-optical disc 65 including a metal plate 67 as a disc clamping magnetic plate mounted to cover a center hole of the magneto-optical disc 65 housed inside of the cartridge body 64.

[0046] On the upper and lower sides of the cartridge body 64, that is, on the upper and lower halves 62, 63, information signal recording/reproducing opening portions 68, 69 are provided which expose, outward, at least a part of a signal recording area in the radial direction of the magneto-optical disc 65 housed therein. Each of these recording/reproducing opening portions 68, 69 is formed in a rectangular shape at a substantially center position in left and right directions of the cartridge body 64, from the vicinity of the disc table entry opening portion 66 shown in Fig.3(b) to the front end side of the cartridge body 64.

[0047] On the cartridge body 64 constituted as described above, a shutter member 70 for opening and closing the recording/reproducing opening portions 68, 69 is mounted to be fit from the front end side of the cartridge body 64, as shown in Figs.3(a) and 3(b).

[0048] Fig.4 shows a more specific structure of essential portions of the disc recording and/or reproducing apparatus having the structure of Fig.1.

[0049] That is, as shown in Fig.4, the disc recording and/or reproducing apparatus includes a stocker 2 for

housing five disc cartridges 1₁, 1₂, 1₃, 1₄ and 1₅ at five housing positions P₁, P₂, P₃, P₄ and P₅, a cartridge detecting unit 3 for detecting presence or absence of the disc cartridge at each of the housing positions P₁, P₂, P₃, P₄ and P₅, and a recording and/or reproducing unit 20 for recording and/or reproducing information signals (hereinafter referred to as accessing, unless distinction is particularly needed) with respect to the one desired by the user from the five disc cartridges 1₁, 1₂, 1₃, 1₄ and 1₅ housed in the stocker 2. The disc recording and/or reproducing apparatus also includes a carrier section 4 for taking out the desired disc cartridge from the stocker 2 to load the disc cartridge onto the recording and/or reproducing unit 20 and for taking out the desired disc cartridge from the recording and/or reproducing unit 20 to carry the disc cartridge to the stocker 2. The disc recording and/or reproducing apparatus also includes a system control circuit 40 so adapted that when a disc cartridge currently accessed by the recording and/or reproducing unit 20 is to be returned to its initial position in the stocker 2, if the cartridge detecting unit 3 outputs a detection signal indicating presence of a disc cartridge at the initial position, the currently accessed disc cartridge is returned to a housing position in the stocker 2 where the cartridge detecting unit 3 has detected absence of a disc cartridge.

[0050] The stocker 2 has the housing positions P₁, P₂, P₃, P₄ and P₅ for housing the five disc cartridges 1₁, 1₂, 1₃, 1₄ and 1₅ in a stacked manner, with these disc cartridges facing the same direction.

[0051] The cartridge detecting unit 3 detects presence or absence of the disc cartridges housed at the housing positions P₁, P₂, P₃, P₄ and P₅ by using a mechanical switch at each of detectors 3₁, 3₂, 3₃, 3₄ and 3₅.

[0052] The carrier section 4 has a slider 4a for leading the desired disc cartridge out of the housing position and leading the desired disc cartridge into the housing position, and an elevator 4b for holding the desired disc cartridge and raising and lowering the disc cartridge. The slider 4a is moved in directions shown by arrows L and R in Fig.4 by a slider moving motor M₁ via a gear mechanism, not shown. The elevator 4b is moved in direction shown by arrows U and D in Fig.4 by a driving force from an elevator moving motor M₂ via a gear mechanism, not shown, meshed with a rack gear formed on one end of a rack plate 7.

[0053] In the carrier section 4, a slider lead-in position detection switch for detecting leading-in of the slider 4a into the stocker 2 is provided. By outputting an on-signal of the detection switch into the system control circuit 40, it is notified that the slider 4a is located on the side of the stocker 2. In the carrier section 4, a slider lead-out position detection switch 9 for detecting leading-out of the slider 4a toward the recording and/or reproducing unit 20 is also provided. By outputting an on-signal from the detection switch 9 into the system control circuit 40, it is notified that the slider 4a is located on the side of the recording and/or reproducing unit 20.

[0054] The position of the elevator 4b is detected by an elevator position detection switch 10. This elevator position detection switch detects the position of the elevator 4b on the basis of a change of light which is transmitted through a slit formed in the rack plate 7 to reach two sets of light receiving elements, for example. The detection signal of the elevator position detection switch is supplied to the system control circuit 40.

[0055] When the desired disc cartridge is being accessed by the recording and/or reproducing unit 20 or when access by this apparatus is normally stopped, the carrier section 4 composed of the slider 4a and the elevator 4b moves the slider 4a toward the recording and/or reproducing unit 20 or toward the stocker 2, so as to be located at the lowermost position referred to as home position. The presence of the carrier section 4 at the home position is detected by a home position switch 11, which outputs a detection signal to the system control circuit 40.

[0056] The recording and/or reproducing unit 20 includes an optical head 21 for radiating reproducing or recording laser beams to the magneto-optical disc 65 as the recordable disc chucked and rotated by a spindle motor 25 when the carrier section 4 is lowered to be located at the home position with the disc cartridge led out, and a magnetic field modulation head 22 for supplying a modulated vertical magnetic field to an irradiation position where the recording laser beams are radiated from the optical head 21. The recording and/or reproducing unit 20 also includes a servo circuit 26 for calculating a detection signal obtained by a photodetector of the optical head 21 to move the light beams radiated onto the recordable disc in the direction of optical axis of the light beams or in the radial direction of the recordable disc, thereby performing focusing servo or tracking servo, and performing servo processing of the spindle motor 25. The recording and/or reproducing unit 20 also includes an encoder and decoder 27 for decoding the information signals recorded on the recordable disc using the detection signal from the photodetector and leading out the decoded signals from an output terminal 28, and for encoding information signals entered from an input terminal 29 and supplying the encoded signals to the optical head 21 and the magnetic field modulation head 22. The recording and/or reproducing unit 20 further includes a recording/reproducing unit control circuit 30 for controlling the entire recording and/or reproducing unit 20 including the encoder and decoder 27, and a RAM 31. The magnetic field modulation head 22 is held in a state rotated in the vertical direction from the recordable disc, that is, the magneto-optical disc by a rotation mechanism 23 driven by a rotation motor 24 and away from the recordable disc, except for the time of recording.

[0057] The reproducing processing of information signals by this recording and/or reproducing unit 20 will now be explained. The magneto-optical disc as the recordable disc is chucked onto the disc table. As an ob-

jective lens of the optical head 21 becomes close to the magneto-optical disc, the spindle motor 25 starts driving so that the magneto-optical disc is rotated.

[0058] In this case, the optical head 21 radiates laser beams to a target track on the magneto-optical disc via the objective lens, and obtains an output signal based on the return light from the magneto-optical disc by the photodetector. The output signal of the photodetector of the optical head 21 is supplied to the servo circuit 26 and to the encoder and decoder 27.

[0059] The servo circuit 26 is constituted by, for example, a focusing servo control circuit, a tracking servo control circuit, a spindle motor control circuit, and a thread servo control circuit. The encoder and decoder 27 calculates the detection signal from the optical head 21, obtains a reproduction output signal, and performs deinterleaving processing and decoding processing for error correction. The information signals thus decoded are temporarily written in the RAM 31 as a buffer memory controlled by the recording/reproducing unit control circuit 30, and then read out and outputted from the output terminal 28. By temporarily storing the signals in the RAM 31, the time for performing recovery operation in case where disturbance is applied is generated.

[0060] The recording processing of information signals onto the magneto-optical disc as the recordable disc by the recording and/or reproducing unit 20 will now be explained. The information signals entered from the input terminal 29 are processed by encoding processing and error correction processing by the encoder and decoder 27, and are supplied to the magnetic field modulation head 22. The magnetic field modulation head 22 generates a modulated vertical magnetic field in accordance with the encoded output signals. As the optical head 21 radiates the recording laser beams onto the magneto-optical disc, the coercive force on the signal recording surface of the magneto-optical disc is lowered so that the direction of magnetization on the signal recording surface changes in accordance with the direction of the vertical magnetic field supplied by the magnetic field modulation head 22. As a result, the direction of magnetization on the signal recording surface of the magneto-optical disc is changed on the basis of the information signals, and the information signals are recorded on the magneto-optical disc.

[0061] Fig.5 shows an example of appearance of the disc recording/reproducing unit 130 of the disc recording and/or reproducing apparatus of Fig.1.

[0062] As the user operates each operating switch on an operating panel 42 as shown in Fig.5, the system control circuit 40 takes out the desired disc cartridge from the stocker 2 using the carrier section 4 shown in Fig.4, loads the disc cartridge on the recording and/or reproducing unit 20, and causes the recording and/or reproducing unit 20 to perform the recording or reproducing operation of the magneto-optical disc housed in the disc cartridge loaded thereon via the recording/reproducing unit control circuit 30.

[0063] On the operating panel 42, a release key (RELEASE) 43, ejection keys (EJECT) 44, disc selection keys 52, recording selection keys 53, a reproduction key 54 and a stop key 55 as shown in Fig.5 are provided.

[0064] The release key 43 is a key for returning the disc cartridge currently accessed by the recording and/or reproducing unit 20 to a predetermined housing position in the stocker 2. Particularly when the user wishes to take out the disc cartridge from the predetermined housing position in the stocker 2, the user operates the ejection key 44 arranged near the corresponding housing position.

[0065] On the operating panel 42, there are also provided a sampling frequency display section (SAMPLING FREQUENCY) for displaying the sampling frequency, such as, 32 KHz, 44.1 KHz or 48 KHz, of the signal recorded on or reproduced from the magneto-optical disc of the disc cartridge to which accessing like recording or reproduction is being carried out, a repeat key (REPEAT) for repeating the access by the recording and/or reproducing unit 20, a display key (DISPLAY) associated with a display section 45 for displaying the name of the currently accessed disc cartridge or the name of the currently accessed track, a skip key (DISK SKIP) used for accessing disc cartridges other than the currently accessed disc cartridge, a continuing key (CONTINUE) for continuing accessing, a random reproduction key (SHUFFLE) for performing random reproduction, and a program key (PROGRAM) for performing program reproduction.

[0066] As shown in Fig.5, at the center portion of the operating panel 42, there is provided a cover portion 51 which has a stocker transparent portion 50 formed theron for allowing the disc cartridges housed in the stocker 2 to be visually observed from outside. Therefore, the user can visually observe album names or the like described on the back portions of the five disc cartridges 1₁, 1₂, 1₃, 1₄ and 1₅ even when the cover portion 51 is closed. On the lower part of the stocker transparent portion 50, a transparent portion for the display section 45 is also formed. When the disc cartridge is to be inserted into or ejected from the stocker 2, the cover portion 51 may be opened as shown in Fig.6.

[0067] The recording/reproducing operation mode of the disc recording and/or reproducing apparatus of Fig. 1 will now be explained in detail.

[0068] First, the above-described second mode, that is, the "5 to 5" mode is explained.

[0069] This disc recording and/or reproducing apparatus has the "5 to 5" mode in which the contents recorded on five optical discs housed in the disc housing section 124a of the disc reproducing unit 120 can be recorded onto five recordable discs housed in the housing section 134a of the disc recording/reproducing unit 130. This mode is selected as the user operates the dial and keys of the operating section 112 of the amplifier/control unit 110.

[0070] Fig.7(a) is a view for explaining the operation

at the time when the above-described mode is selected. In this case, "O" represents the first to fifth optical discs and "□" represents the first to fifth recordable discs. That is, in procedure 1, the contents of the first optical disc housed in the disc housing section 124a are recorded onto the first recordable disc housed in the housing section 134a. Similarly, in procedures 2 to 5, the contents of the second to fifth optical discs housed in the disc housing section 124a are sequentially recorded onto the second to fifth recordable discs housed in the housing section 134a. The indication as shown in Figs.7(a) and 7(b) may be displayed, for example, on the display section 113 of the amplifier/control unit 110.

[0071] At this point, for example, if the third optical disc as indicated by a dashed line among the five optical discs which should be housed in the disc housing section 124a is not housed therein, or if the second recordable disc among the five recordable discs which should be housed in the housing section 134a is not housed therein, that is, if any one of the optical discs and/or the recordable discs is not housed as in procedures 2 and 3 of Fig.7(b), these procedures are not executed and the subsequent procedures are sequentially executed. When reproduction of the optical discs has been completed, or when recording onto the recordable discs has been completed, the processing in the "5 to 5" mode is ended. An error message indicating the end may be displayed on the display section 113 of the amplifier/control unit 110.

[0072] Fig.8 is an exemplary flowchart showing the flow of processing for executing one procedure in the recording/reproducing operation mode, the "5 to 5" mode, as described above with reference to Figs.7(a) and 7(b).

[0073] At step S1, the disc carrier section 124b of the disc reproducing unit 120 takes out the first optical disc housed in the disc housing section 124a and loads it on the spindle, so that the disc reproducing section stands by for starting the reproducing operation (hereinafter referred to as reproduction pause). At this point, the optical head of the disc reproducing unit 120 is moved to a reading start position for the optical disc and then waits in a pause state for a reading start command. The carrier section 134b of the disc recording/reproducing unit 130 takes out the first recordable disc, in this case, the first disc cartridge, housed in the housing section 134a and loads (chucks) it on the recording/reproducing section 134c, so that the recording/reproducing section 134c stands by for starting the recording operation (hereinafter referred to as recording pause). At this point, the optical head and the magnetic head of the recording/reproducing section 134c may be moved to a recording start position.

[0074] At step S2, it is confirmed whether or not the first optical disc loaded on the disc reproducing section 124c of the disc reproducing unit 120 is in the reproduction pause state. When it is confirmed that the loaded optical disc is in the reproduction pause state, the oper-

ation proceeds to step S4. On the other hand, when the first optical disc is not loaded, the operation proceeds to step S3. Whether the first optical disc is loaded or not is detected in accordance with, for example, whether or not the table of contents information of the first optical disc held by the control circuit 121 of the disc reproducing unit 120 coincides with the table of contents information of the optical disc read out by the reproducing section 124c.

[0075] At step S3, the disc carrier section 124b of the disc reproducing unit 120 takes out the optical disc of the next number (in this case, the second optical disc) housed in the disc housing section 124a and loads it on the reproducing section 124c, so that the reproducing section 124c stands by for starting the reproducing operation (reproduction pause). The carrier section 134b of the disc recording/reproducing unit 130 takes out the second recordable disc housed in the housing section 134a and loads it on the recording/reproducing section 134c, so that the recording/reproducing section 134c stands by for starting the recording operation (recording pause). Then, the operation returns to step S2.

[0076] At step S4, it is confirmed whether or not the first recordable disc loaded on the recording/reproducing section 134c of the disc recording/reproducing unit 130 is in the recording pause state. When it is confirmed that the loaded recordable disc is in the recording pause state, the operation proceeds to step S6. On the contrary, when the first recordable disc is not loaded, the operation proceeds to step S5. Whether the first recordable disc is loaded or not may be discriminated by discriminating an output from the detector 3₁ of the plural detectors 3₁ to 3₅ shown in Fig.4 by the control circuit 131, or on the basis of the table of contents information by a technique similar to that used in the disc reproducing unit 120 as described above.

[0077] At step S5, the carrier section 134b of the disc recording/reproducing unit 130 takes out the recordable disc of the next number (in this case, the second recordable disc) housed in the housing section and loads it on the recording/reproducing section 134c, so that the recording/reproducing section 134c stands by for starting the recording operation (recording pause). The disc carrier section 124b of the disc reproducing unit 120 takes out the second optical disc housed in the disc housing section 124a and loads it on the reproducing section 124c, so that the reproducing section 124c stands by for starting the reproducing operation (reproduction pause). Then, the operation returns to step S2.

[0078] At step S6, it is confirmed whether or not both the optical disc and the recordable disc of the same number, for example, the second optical disc and the second recordable disc, are in the standby state. When it is confirmed that both of these discs are in the standby state, the operation proceeds to step S7. On the other hand, when both of these disc are not in the standby state, for example, when lead-in of the focusing servo may not be performed, the operation ends.

[0079] The process from step S2 to step S6, that is, the process for confirming whether or not both the optical disc and the recordable disc of the same number, for example, the second optical disc and the second recordable disc, are in the standby state, is a process to be used again and is hereinafter referred to as "process A".

[0080] At step S7, input of a dubbing start signal as a control signal indicating the start of dubbing is monitored. This dubbing start signal is inputted by, normally, pressing the enter key (ENTER) of the operating section 112 of the amplifier/control unit 110 or pressing the play key (PLAY) of the operating switch group 132 of the disc recording/reproducing unit 130. When it is confirmed that this control signal has been inputted, the operation proceeds to step S8.

[0081] At step S8, the reproduction pause state of the first optical disc is released so that reproduction of the optical disc by the reproducing section 124c is started. At the same time, the recording pause state of the first recordable disc is released so that recording of music signals reproduced from the optical disc by the reproducing section 124c onto the recordable disc by the recording/reproducing section 134c is started. The disc loading mechanism of the recording and/or reproducing apparatus using the recordable disc is generally more complicated than the disc loading mechanism of the reproducing apparatus for the so-called compact disc. Therefore, loading of the recordable disc is often more time-consuming than loading of the optical disc.

[0082] In consideration of this loading time, in the disc recording and/or reproducing apparatus according to the embodiment of the present invention, when the disc recording/reproducing unit 130 is ready to start recording, the above-described recording preparation completion signal as a control signal indicating the completion of preparation for recording is outputted from the control circuit 131. In the disc reproducing unit 120, when the control circuit 121 receives this recording preparation completion signal, the control circuit 121 performs control to start the reproducing operation of the optical disc. The disc reproducing unit 120 which has started the reproducing operation of the optical disc transmits information signals, such as, signals between musical pieces, to the disc recording/reproducing unit 130. On the

[0083] basis of the information signals, the control circuit 131 of the disc recording/reproducing unit 130 performs control to actually start the recording operation to the recordable disc. Being ready to start recording in this case means a state where the above-described various servos are normally done on the recordable disc so as to simply wait for the data to be recorded. At this point, the optical head and the magnetic head are located at either the initial position or the recording start position. This also applies to the following operations.

[0084] At step S9, it is monitored whether or not the condition of "completion of recording onto the recordable disc" or "completion of reproduction of the optical disc" is satisfied. When either condition is satisfied, the

operation proceeds to step S10. Whether the recording onto the recordable disc has been completed or not is determined by, for example, monitoring by the control circuit 131 whether or not there is no reproduced signal supplied from the reproducing unit 120 and whether or not there is no data held in the RAM 31 of Fig.4. Whether the reproduction of the optical disc has been completed or not is determined by, for example, detecting by the control circuit 121 whether or not the last address of the information signals like music signals recorded on the optical disc has been reached, or whether or not the last address of the information signals programmed to be reproduced last has been reached in the case of the program reproduction. If the reproduction of the optical disc has ended even when the recording operation to the recordable disc is being continued, or if there is no recordable area of the recordable disc even when the reproducing operation of the optical disc is being continued, the operation proceeds to step S10.

[0084] At step S10, the table of contents (TOC) information indicating the contents of the recorded information is written and the recording operation to the recordable disc ends. The carrier section 134b returns the first recordable disc to the housing section 134a. The recordable disc has a data recording area in which information signals from the reproducing unit 120 are to be recorded, and a management information area in which management information including the table of contents information used for the recording or reproducing operation for the data recording area is to be recorded. In this management information area, the table of contents information is recorded before the recordable disc is returned to the housing section 134a by the carrier section 134b. This table of contents information is generated by the control circuit 131 during the recording operation and is stored in the RAM.

[0085] At step S11, whether the recording up to the fifth recordable disc has been completed or not is monitored by the control circuit 131. When the recording has been completed up to the fifth recordable disc, the operation in the "5 to 5" mode ends. On the other hand, when the recording has not been completed up to the fifth recordable disc, the operation proceeds to step S12.

[0086] At step S12, the carrier section 134b of the disc recording/reproducing unit 130 takes out the recordable disc of the next number (the recordable disc subsequent to the second recordable disc) from the housing section 134a and loads it on the recording/reproducing section 134c so that the recording/reproducing section 134c is ready for recording and is thus maintained in the recording pause state. The reproducing section 124c of the reproducing unit 120 is ready for starting reproduction from the leading part of the optical disc and is thus maintained in the reproduction pause state. Through the "process A" again, the operation returns to step S8 and repeats the similar procedures until the recording to the fifth recordable disc is completed.

[0087] The third mode, that is, the "1 to 5" mode, of the disc recording and/or reproducing apparatus of Fig. 1 is now explained.

[0088] This disc recording and/or reproducing apparatus has the "1 to 5" mode in which the contents recorded on an arbitrary one of up to five optical discs housed in the disc housing section 124a of the disc reproducing unit 120 can be sequentially recorded onto each of five recordable discs housed in the housing section 134a of the disc recording/reproducing unit 130. This "1 to 5" mode is selected as the user operates the dial and keys of the operating section 112 of the amplifier/control unit 110.

[0089] Fig.9(a) is a view for explaining the operation at the time when the "1 to 5" mode is selected. In this case, "O" represents the first to fifth optical discs and "□" represents the first to fifth recordable discs. That is, in procedure 1, the contents of the first optical disc housed in the disc housing section 124a are recorded onto the first recordable disc housed in the housing section 134a. Similarly, in procedures 2 to 5, the contents of the first optical disc housed in the disc housing section 124a are sequentially recorded onto the second to fifth recordable discs. The indication as shown in Figs.9(a) and 9(b) may be displayed, for example, on the display section 113 of the amplifier/control unit 110.

[0090] At this point, for example, if the third optical disc among the five optical discs which should be housed in the disc housing section 124a is not housed therein, or if the second recordable disc among the five recordable discs which should be housed in the housing section 134a is not housed therein, that is, if any one of the optical discs and/or the recordable discs is not housed as in procedures 2 and 3 of Fig.9(b), these procedures are not executed. The absent recordable disc is skipped and the operation to the next recordable disc is continuously executed. When the second optical disc shown in Fig.9(b) is selected, an error message is displayed and the "1 to 5" mode is not executed.

[0091] At this point, for example, if the second and fourth optical discs as indicated by dashed lines among the five optical discs which should be housed in the disc housing section 124a are not housed therein, or if the third recordable disc among the five recordable discs which should be housed in the housing section 134a is not housed therein, the procedure for performing recording onto the recordable disc not housed therein is not executed and the recording operation to the subsequent recordable disc is sequentially executed. When the optical disc not housed in the disc housing section 124a is designated, the "1 to 5" mode is not entered and an error message indicating this is displayed on the display section 113 of the amplifier/control unit 110.

[0092] In this disc recording and/or reproducing apparatus, the optical disc to be reproduced in the "1 to 5" mode can be arbitrarily designated. However, if the designation is not performed, the optical disc loaded on the reproducing section 124c is preferentially selected.

When the reproduction of the selected optical disc has been completed, or when the recording to the recordable disc has been completed, the operation in the "1 to 5" mode ends. Whether the reproduction or recording has been completed or not is detected in a manner similar to that of the "5 to 5" mode as described above.

[0093] Fig.10 is an exemplary flowchart showing the flow of processing for executing one procedure in the recording/reproducing operation mode, the "1 to 5" mode, as described above with reference to Figs.9(a) and 9(b).

[0094] At step S21, the user uses the operating section 112 of the amplifier/control unit 110 to designate the number of a desired optical disc housed in the disc housing section 124a of the disc reproducing unit 120.

[0095] At step S22, it is confirmed whether or not the optical disc designated at step S21 is housed in the disc housing section 124a. When it is confirmed that the designated optical disc is housed therein, the operation proceeds to step S23. On the other hand, when the designated optical disc is not housed therein, the operation forcedly ends. Whether the designated optical disc is housed or not is detected by providing a detecting sensor on the housing section 124a of the disc reproducing unit 120.

[0096] At step S23, the disc carrier section 124b of the disc reproducing unit 120 takes out the designated optical disc from the housing section and loads the optical disc on the reproducing section 124c, so that the reproducing section 124c is ready for reproduction and is thus maintained in a standby (reproduction pause) state. The carrier section 134b of the disc recording/reproducing unit 130 takes out the first recordable disc from the housing section 134a and loads the recordable disc on the recording/reproducing section 134c, so that the recording/reproducing section 134c is ready for recording and is thus maintained in a standby (recording pause) state.

[0097] At step S24, it is confirmed whether or not the first recordable disc is in the recording pause state. When it is detected that the first recordable disc is not loaded, the operation proceeds to step S25. Then, the next recordable disc (in this case, the second recordable disc) is taken out from the housing section 134a and loaded on the recording/reproducing section 134c, so that the recording/reproducing section 134c is ready for recording and is thus maintained in the standby (recording pause) state. Then, the operation proceeds to step S26. On the other hand, when it is confirmed that the first recordable disc is in the recording pause state, the operation proceeds directly to step S26. Whether the first recordable disc is loaded or not is detected by a technique similar to that used in the "5 to 5" mode as described above.

[0098] The process of step S24 to step S25, that is, the process for confirming whether or not the recordable disc is in the recording pause state, is a process to be used again and is hereinafter referred to as "process B".

[0099] At step S26, input of a dubbing start signal as a control signal indicating the start of dubbing is monitored. This dubbing start signal is inputted by, normally, pressing the enter key (ENTER) of the operating section 112 of the amplifier/control unit 110 or pressing the play key (PLAY) of the operating switch group 132 of the disc recording/reproducing unit 130. When this control signal has been inputted to the control circuit 121 or the control circuit 131, the operation proceeds to step S27.

5 [0100] At step S27, the reproduction pause state of the first optical disc is released so that reproduction of the optical disc by the reproducing section 124c is started. At the same time, the recording pause state of the first recordable disc is released so that recording of music signals reproduced from the first optical disc by the reproducing section 124c onto the first recordable disc by the recording/reproducing section 134c is started. The disc loading mechanism of the recording and/or reproducing apparatus using the recordable disc is generally more complicated than the disc loading mechanism of the reproducing apparatus for the so-called compact disc. Therefore, loading of the recordable disc is often more time-consuming than loading of the optical disc.

10 [0101] In consideration of this loading time, in the disc recording and/or reproducing apparatus according to the embodiment of the present invention, when the disc recording/reproducing unit 130 is ready to start recording, the above-described recording preparation completion signal as a control signal indicating the completion of preparation for recording is transmitted. On receiving this recording preparation completion signal, the disc reproducing unit 120 starts the reproducing operation of the optical disc by the reproducing section 124c. The

15 disc reproducing unit 120 which has started the reproducing operation of the optical disc transmits information signals, such as, signals between musical pieces, to the control circuit 131 of the disc recording/reproducing unit 130. On the basis of the information signals, the disc recording/reproducing unit 130 releases the recording pause state and actually starts the recording operation to the recordable disc.

20 [0102] At step S28, it is monitored whether or not the condition of "completion of recording onto the recordable disc" or "completion of reproduction of the optical disc" is satisfied. When either condition is satisfied, the operation proceeds to step S29. Whether the recording onto the recordable disc has been completed or not, and whether the reproduction of the optical disc has been completed or not, are determined by techniques similar to those used in the "5 to 5" mode as described above.

25 [0103] At step S29, the table of contents (TOC) information indicating the contents of the recorded information is written and the recording operation to the recordable disc ends. The carrier section 134b returns the first recordable disc to the housing section 134a. The recording operation of this table of contents information is performed in a manner similar to the above-described step

S10.

[0104] At step S30, whether the recording up to the fifth recordable disc has been completed or not is monitored by the control circuit 131. When the recording has been completed up to the fifth recordable disc, the operation in the "1 to 5" mode ends. On the other hand, when the recording has not been completed up to the fifth recordable disc, the operation proceeds to step S31.

[0105] At step S31, the carrier section 134b of the disc recording/reproducing unit 130 takes out the next recordable disc (the recordable disc subsequent to the second recordable disc) from the housing section 134a and loads it on the recording/reproducing section 134c so that the recording/reproducing section 134c is ready for recording and is thus maintained in the recording pause state. The reproducing section 124c of the reproducing unit 120 is ready for starting reproduction from the leading part of the optical disc and is thus maintained in the reproduction pause state. Through the "process B" again, the operation returns to step S27 and repeats the similar procedures until the recording to the fifth recordable disc is completed.

[0106] The fourth mode, that is, the "5 to 1" mode, of the disc recording and/or reproducing apparatus of Fig. 1 is now explained.

[0107] This disc recording and/or reproducing apparatus has the "5 to 1" mode in which only the contents recorded on an arbitrary track (for example, the first track) of each of up to five optical discs housed in the disc housing section 124a of the disc reproducing unit 120 can be sequentially recorded onto an arbitrary or selected one of up to five recordable discs housed in the housing section 134a of the disc recording/reproducing unit 130. This "5 to 1" mode is selected as the user operates the dial and keys of the operating section 112 of the amplifier/control unit 110.

[0108] Fig.11(a) is a view for explaining the operation at the time when the "5 to 1" mode is selected. In this case, "O" represents the first to fifth optical discs and "□" represents the first to fifth recordable discs. That is, only the contents of the first track of each of the optical discs housed in the disc housing section 124a are sequentially recorded onto, for example, the first recordable disc housed in the housing section 134a. Thus, the above-described mode in which only the contents recorded on the first track of the optical discs are collectively recorded onto one recordable disc is referred to as the "5 to 1" mode.

[0109] At this point, for example, if the second and fourth optical discs among the five optical discs which should be housed in the disc housing section 124a are not housed therein, the second and fourth optical discs are not displayed on the display section 113 as shown in Fig.11(b). The procedures for recording the contents of the optical discs not housed therein are not executed. The subsequent optical discs, in this case, the third and fifth optical discs, are sequentially taken out from the

housing section 124a, and information signals on the first track of each of these optical discs are reproduced by the reproducing section 124c.

[0110] The indication as shown in Figs.11(a) and 11(b) may be displayed, for example, on the display section 113 of the amplifier/control unit 110. If there is any optical disc not housed in the housing section, an error message indicating this may be displayed on the display section 113 of the amplifier/control unit 110.

[0111] The plural recordable discs are housed in the housing section 124a. Therefore, in order to prevent erroneous recording on these recordable discs, when the recording/reproducing operation mode is selected in this disc recording and/or reproducing apparatus, the control circuit 131 performs control such that recording may be carried out only on the first recordable disc.

[0112] In the case where the contents of more than five optical discs are to be recorded continuously, after the above-described flow of operation is completed, the optical discs housed in the disc housing section 124a may be exchanged during or after the recording operation by the recording/reproducing section 134c so that the recording of the contents of the sixth and subsequent optical discs may be continued. In this case, the "5 to 1" mode is maintained until the recording operation of the recordable discs is completed. When the reproduction of the optical disc has been completed, or when the recording onto the recordable disc has been completed, the operation in the "5 to 1" mode ends.

[0113] In the above-described recording/reproducing operation mode, the flow of operation for executing the so-called hit parade recording is similar to the flow shown in Fig.8. In this case, however, at step S19 for determining whether the reproduction of the optical disc has been completed or not, a code (subcode) for reproducing only a desired track is used for the determination.

[0114] Although the above-described embodiments are explained using the magneto-optical disc as the recordable disc, a phase-changed type optical disc or a magnetic disc may be used. In addition, the present invention is applicable not only in the case where the disc-shaped recording medium is used but also in the case where a recording medium housed in the stocker and exchangeable by the media exchange mechanism, for example, a digital audio tape, is used. It is a matter of course that various modifications and changes may be effected without departing from the scope of the present invention.

50

Claims

1. A recording and reproducing apparatus comprising:

55 a reproducing unit (120) having a first recording medium (65) loaded thereon and adapted for reproducing a first recording medium, and a recording unit (130) adapted for recording in-

formation signals reproduced by the reproducing unit (120) onto a second recording medium,

wherein

the recording unit (130) is supplying a control signal to the reproducing unit, and the reproducing unit (120) starts reproducing the first recording medium on the basis of the control signal supplied from the recording unit (130), and supplies reproduced signals to the recording unit (130),

characterized in that

the control signal supplied from the recording unit (130) to the reproducing unit (120) indicates completion of preparation for recording the information signals onto the second recording medium; wherein

the reproducing unit (120) is set in a reproduction standby state when the first recording medium is loaded thereon, the reproducing unit (120) having the reproduction standby state released on the basis of the control signal indicating completion of preparation for recording so as to start reproduction of the first recording medium; and

the recording unit (130) is set in a recording standby state and outputs the control signal indicating completion of preparation for recording when the second recording medium is loaded thereon, the recording unit (130) having the recording standby state released by the reproduced signals supplied from the reproducing unit (120) so as to record the reproduced signals from the reproducing unit (120) onto the second recording medium.

2. The recording and reproducing apparatus as claimed in claim 1, wherein the reproducing unit (120) has a plurality of first recording media loaded thereon and is adapted for sequentially reproducing one of the plurality of loaded first recording media.
3. The recording and reproducing apparatus as claimed in claim 1 or 2, wherein the recording unit (130) has a plurality of recordable second recording media loaded thereon, each having a recording area which is capable of recording information signals therein and a management information area in which management information including at least table of contents information of the information signals recorded in the recording area is recorded, the recording unit (130) being adapted for recording information signals and management information onto one of the plurality

of loaded second recording media.

4. The recording and reproducing apparatus as claimed in one of the proceeding claims, wherein the recording unit (130) records the management information of the information signals recorded in the recording area into the management information area of the second recording medium after completion of reproduction of the first recording medium by the reproducing unit (120).
5. The recording and reproducing apparatus as claimed in one of the proceeding claims, wherein the reproducing unit (120) ends reproduction of the first recording medium when recording of the information signals onto the second recording medium by the recording unit (130) is completed during the reproduction of the first recording medium.
6. The recording and reproducing apparatus as claimed in one of the proceeding claims, wherein the reproducing unit (120) has a first housing section (124a) for housing the plurality of first recording media loaded thereon and a first carrier mechanism (124b) for taking out one of the first recording media from the first housing section (124a) and carrying the first recording medium to the reproducing unit (120), and the recording unit (130) has a second housing section (134a) for housing the plurality of second recording media loaded thereon and a second carrier mechanism (134b) for taking out one of the second recording media from the second housing section (134a) and carrying the second recording medium to the recording unit (130), so that after completion of reproduction of the first recording medium by the reproducing unit (120) or completion of recording of the information signals onto the second recording medium by the recording unit (130), the first recording medium reproduced by the reproducing unit (120) is returned to the first housing section (124a) by the first carrier mechanism (124b) while the second recording medium recorded by the recording unit (130) is returned to the second housing section (134a) by the second carrier mechanism (134b).
7. The recording and reproducing apparatus as claimed in claim 6, wherein the recording unit (130) records the management information of the information signals recorded in the recording area into the management information area of the second recording medium before the second recording medium is returned to the second housing section by the second carrier mechanism (134b), so that the second recording medium is returned to the second housing section (134a) by the second carrier mechanism (134b) af-

recording medium by the reproducing unit (120), the recording unit (130) records the management information of the information signals recorded in the recording area into the management information area of the second recording medium.

15. The recording and reproducing method as claimed in claim 14,

wherein the reproduction of the first recording medium by the reproducing unit (120) is ended when recording of the information signals onto the second recording medium by the recording unit (130) is completed during the reproduction of the first recording medium by the reproducing unit (120).

16. The recording and reproducing method as claimed in one of claims 11 to 15,

the method repeating operations of exchanging the first recording medium of the reproducing unit (120) and loading another first recording medium to set the reproducing unit (120) in a reproduction standby state while exchanging the second recording medium of the recording unit (130) and loading another second recording medium to set the recording unit (130) in a recording standby state after completion of recording of one of the second recording media by the recording unit (130), having the reproduction standby state of the reproducing unit (120) released on the basis of the control signal indicating completion of preparation for recording of the recording unit (130) so as to start reproduction of the another first recording medium, and recording the reproduced signals from the reproducing unit (120) onto the another second recording medium by the recording unit (130).

17. The recording and reproducing method as claimed in one of claims 11 to 16,

wherein the reproduced signals of the first recording medium reproduced by the reproducing unit (120) are recorded by the recording unit (130) onto each of the second recording media housed in the second housing section (134a).

18. The recording and reproducing method as claimed in one of claims 11 to 17,

wherein specified information signals of one of the first recording media are reproduced by the reproducing unit (120), the reproduced specified information signals being recorded onto the second recording medium by the recording unit (130), the recording unit (130) being set in the recording standby state after completion of the reproduction of the specified information signals of the one first recording medium by the reproducing unit (120), the one first recording medium being exchanged with another first recording medium by the first carrier mechanism (124b) to reproduce specified informa-

tion signals of the another first recording medium by the reproducing unit (120), the recording standby state of the recording unit (130) being released to record the specified information signals onto the second recording medium.

Patentansprüche

- 10 1. Aufzeichnungs- und Wiedergabegerät, welches aufweist:

15 eine Wiedergabeeinheit (120), welche einen ersten darauf geladenen Aufzeichnungsträger (65) aufweist und ausgebildet ist, um einen ersten Aufzeichnungsträger wiederzugeben, und eine Aufzeichnungseinheit (130), die ausgebildet ist, Informationssignale, welche durch die Wiedergabeeinheit (120) wiedergegeben werden, auf einem zweiten Aufzeichnungsträger aufzuzeichnen,

wobei

25 die Aufzeichnungseinheit (130) ein Steuersignal zur Wiedergabeeinheit liefert, und die Wiedergabeeinheit (120) das Wiedergeben des ersten Aufzeichnungsträgers auf der Basis des Steuersignals, welches von der Aufzeichnungseinheit (130) geliefert wird, beginnt und die wiedergegebenen Signale zur Aufzeichnungseinheit (130) liefert,

30 dadurch gekennzeichnet, daß

35 das Steuersignal, welches von der Aufzeichnungseinheit (130) zur Wiedergabeeinheit (120) geliefert wird, die Beendigung der Vorbereitung zum Aufzeichnen der Informationssignale auf dem zweiten Aufzeichnungsträger anzeigen; wobei
40 die Wiedergabeeinheit (120) in einen Wiedergabe-Bereitschaftszustand versetzt wird, wenn der erste Aufzeichnungsträger darauf geladen ist, wobei der Wiedergabe-Bereitschaftszustand der Wiedergabeeinheit (120) auf der Basis des Steuersignals gelöscht wird, welches den Abschluß der Vorbereitung zum Aufzeichnen zeigt, um die Wiedergabe des ersten Aufzeichnungsträgers zu beginnen; und
45 die Aufzeichnungseinheit (130) in einen Aufzeichnungs-Bereitschaftszustand versetzt wird und das Steuersignal, welches den Abschluß der Vorbereitung zum Aufzeichnen zeigt, wenn der zweite Aufzeichnungsträger darin geladen ist, ausgibt, wobei der Aufzeichnungs-Bereitschaftszustand der Aufzeichnungseinheit (130) durch die Wiedergabesignale gelöscht

- wird, die von der Aufzeichnungseinheit (120) geliefert werden, um die Wiedergabesignale von der Wiedergabeeinheit (120) auf dem zweiten Aufzeichnungsträger aufzuzeichnen.
2. Aufzeichnungs- und Wiedergabegerät nach Anspruch 1,
wobei die Wiedergabeeinheit (120) mehrere erste Aufzeichnungsträger, die darauf geladen sind, aufweist und ausgebildet ist, um nacheinander einen der mehreren geladenen ersten Aufzeichnungsträger wiederzugeben.
3. Aufzeichnungs- und Wiedergabegerät nach Anspruch 1 oder 2,
wobei die Aufzeichnungseinheit (130) mehrere beschreibbare zweite Aufzeichnungsträger, die darauf geladen sind, aufweist, wobei jeder einen Aufzeichnungsbereich aufweist, auf dem Informationssignale aufgezeichnet werden können, und einen Verwaltungsinformationsbereich, auf welchem Verwaltungsinformation einschließlich zumindest Inhaltstabelleninformation der Informationssignale, die im Aufzeichnungsbereich aufgezeichnet sind, aufgezeichnet ist, wobei die Aufzeichnungseinheit (130) ausgebildet ist, Informationssignale und Verwaltungsinformation auf einem der mehreren geladenen zweiten Aufzeichnungsträger aufzuzeichnen.
4. Aufzeichnungs- und Wiedergabegerät nach einem der vorhergehenden Ansprüche, wobei die Aufzeichnungseinheit (130) die Verwaltungsinformation der Informationssignale, welche im Aufzeichnungsbereich aufgezeichnet sind, im Verwaltungsinformationsbereich des zweiten Aufzeichnungsträgers nach Beendigung der Wiedergabe des ersten Aufzeichnungsträgers durch die Wiedergabeeinheit (120) aufzeichnet.
5. Aufzeichnungs- und Wiedergabegerät nach einem der vorhergehenden Ansprüche, wobei die Wiedergabeeinheit (120) die Wiedergabe des ersten Aufzeichnungsträgers beendet, wenn das Aufzeichnen der Informationssignale auf dem zweiten Aufzeichnungsträger durch die Aufzeichnungseinheit (130) während der Wiedergabe des ersten Aufzeichnungsträgers beendet ist.
6. Aufzeichnungs- und Wiedergabegerät nach einem der vorhergehenden Ansprüche, wobei die Wiedergabeeinheit (120) einen ersten Unterbringungsabschnitt (124a) aufweist, um die mehreren ersten Aufzeichnungsträger, die darauf geladen sind, unterzubringen, und einen ersten Transportmechanismus (124b), um einen der ersten Aufzeichnungsträger vom ersten Unterbringungsabschnitt (124a) herauszunehmen und um den ersten Aufzeichnungsträger zur Wiedergabeeinheit (120) zu transportieren, und die Aufzeichnungseinheit (130) einen zweiten Unterbringungsabschnitt (134a) aufweist, um die mehreren zweiten Aufzeichnungsträger, die darauf geladen sind, unterzubringen, und einen zweiten Transportmechanismus (134b), um einen der zweiten Aufzeichnungsträger vom zweiten Unterbringungsabschnitt (134a) herauszunehmen und um den zweiten Aufzeichnungsträger zur Aufzeichnungseinheit (130) zu transportieren, so daß nach Abschluß der Wiedergabe des ersten Aufzeichnungsträgers durch die Wiedergabeeinheit (120) oder nach Abschluß der Aufzeichnung der Informationssignale auf dem zweiten Aufzeichnungsträger durch die Aufzeichnungseinheit (130) der erste Aufzeichnungsträger, der durch die Wiedergabeeinheit (120) wiedergegeben wurde, zum ersten Unterbringungsabschnitt (124a) durch den ersten Transportmechanismus (124b) zurückgebracht wird, während der zweite Aufzeichnungsträger, der durch die Aufzeichnungseinheit (130) beschrieben wurde, zum zweiten Unterbringungsabschnitt (134a) durch den zweiten Transportmechanismus (134b) zurückgebracht wird.
7. Aufzeichnungs- und Wiedergabegerät nach Anspruch 6,
wobei die Aufzeichnungseinheit (130) die Verwaltungsinformation der Informationssignale, welche im Aufzeichnungsbereich aufgezeichnet sind, im Verwaltungsinformationsbereich des zweiten Aufzeichnungsträgers aufzeichnet, bevor der zweite Aufzeichnungsträger zum zweiten Unterbringungsabschnitt durch den zweiten Transportmechanismus (134b) zurückgebracht wird, so daß der zweite Aufzeichnungsträger zum zweiten Unterbringungsabschnitt (134a) durch den zweiten Transportmechanismus (134b) nach Beendigung der Aufzeichnung der Verwaltungsinformation zurückgebracht wird.
8. Aufzeichnungs- und Wiedergabegerät nach Anspruch 6 oder 7,
wobei das Gerät Operationen zum Wechseln des ersten Aufzeichnungsträgers durch den ersten Transportmechanismus (124b) wiederholt, um die Wiedergabeeinheit (120) in einen Wiedergabe-Bereitschaftszustand zu versetzen, während der zweite Aufzeichnungsträger durch den zweiten Transportmechanismus (134b) gewechselt wird, um die Aufzeichnungseinheit (130) in einen Aufzeichnungs-Bereitschaftszustand nach Beendigung der Aufzeichnung von einem der zweiten Aufzeichnungsträger durch die Aufzeichnungseinheit (130) zu versetzen, wobei der Wiedergabe-Bereitschaftszustand auf der Basis des Steuersignals gelöscht wird, welches die Beendigung der Vorbereitung zum Aufzeichnen der Aufzeichnungseinheit

- (130) zeigt, um die Wiedergabe des ersten Aufzeichnungsträgers zu beginnen und um die wiedergegebenen Signale von der Wiedergabeeinheit (120) auf dem zweiten Aufzeichnungsträger durch die Aufzeichnungseinheit (130) aufzuzeichnen.
9. Aufzeichnungs- und Wiedergabegerät nach einem der Ansprüche 6 bis 9, wobei die Wiedergabesignale des ersten Aufzeichnungsträgers, die durch die Wiedergabeeinheit (120) wiedergegeben werden, durch die Aufzeichnungseinheit (130) auf jedem der zweiten Aufzeichnungsträger, welche im zweiten Unterbringungsabschnitt (134a) untergebracht sind, aufgezeichnet werden.
10. Aufzeichnungs- und Wiedergabegerät nach einem der Ansprüche 6 bis 9,
wobei spezifizierte Informationssignale von einem der ersten Aufzeichnungsträger durch die Wiedergabeeinheit (120) wiedergegeben werden, wobei die wiedergegebenen spezifizierten Informationssignale durch die Aufzeichnungseinheit (130) auf dem zweiten Aufzeichnungsträger aufgezeichnet werden, wobei die Aufzeichnungseinheit (130) in den Aufzeichnungs-Bereitschaftszustand nach Beendigung der Wiedergabe der spezifizierten Informationssignale des einen ersten Aufzeichnungsträgers durch die Wiedergabeeinheit (120) versetzt ist, wobei der erste eine Aufzeichnungsträger durch den anderen ersten Aufzeichnungsträger durch den ersten Transportmechanismus (124a) ausgetauscht wird, um spezifizierte Informationssignale des anderen ersten Aufzeichnungsträgers durch die Wiedergabeeinheit (120) wiederzugeben, wobei der Aufzeichnungs-Bereitschaftszustand der Aufzeichnungseinheit (130) gelöscht wird, um die spezifizierten Informationssignale auf dem zweiten Aufzeichnungsträger aufzuzeichnen.
11. Aufzeichnungs- und Wiedergabeverfahren, bei dem eine Wiedergabeeinheit (120) verwendet wird, um einen von mehreren ersten Aufzeichnungsträgern wiederzugeben, die in einem ersten Unterbringungsabschnitt (124a) untergebracht sind und auf denen Informationssignale aufgezeichnet sind, und eine Aufzeichnungseinheit (130), um die Informationssignale, die durch die Wiedergabeeinheit (120) wiedergegeben werden, auf einem von beschreibbaren zweiten Aufzeichnungsträgern aufzuzeichnen, welche in einem zweiten Unterbringungsabschnitt (134a) untergebracht sind, und wobei jeder einen Aufzeichnungsbereich hat, auf dem Informationssignale aufgezeichnet werden können, und einen Verwaltungsinformationsbereich, auf welchem Verwaltungsinformation aufgezeichnet ist, die zumindest Inhaltstabelleninformation der Informationssignale aufweist, die auf dem Aufzeichnungsbereich aufgezeichnet sind, wobei das Verfahren folgende Schritte aufweist:
- 5 Herausnehmen eines der ersten Aufzeichnungsträger vom ersten Unterbringungsabschnitt (124a), Laden des einen ersten Aufzeichnungsträgers auf die Wiedergabeeinheit (120) und Versetzen der Wiedergabeeinheit (120) in einen Wiedergabe-Bereitschaftszustand für den geladenen ersten Aufzeichnungsträger; und
- 10 Herausnehmen eines der zweiten Aufzeichnungsträger vom zweiten Unterbringungsabschnitt (134a), Laden des zweiten einen Aufzeichnungsträgers auf die Aufzeichnungseinheit (130), Versetzen der Aufzeichnungseinheit (130) in einen Aufzeichnungs-Bereitschaftszustand für den geladenen zweiten Aufzeichnungsträger und Ausgeben eines Steuersignals, welches die Beendigung der Vorbereitung zum Aufzeichnen zeigt;
- 15 wobei die Wiedergabeeinheit (120) die Wiedergabe des ersten Aufzeichnungsträgers auf der Basis des Steuersignals beginnt, welches den Abschluß der Vorbereitung zum Aufzeichnen zeigt, welches von der Aufzeichnungseinheit (130) geliefert wird, und die Wiedergabesignale zur Aufzeichnungseinheit (130) liefert, während die Aufzeichnungseinheit (130) die zu ihr gelieferten Wiedergabesignale auf dem zweiten Aufzeichnungsträger aufzeichnet.
- 20
- 25
- 30
- 35
- 40
- 45
- 50
- 55
12. Aufzeichnungs- und Wiedergabeverfahren nach Anspruch 11, wobei die Wiedergabeeinheit (120) in den Wiedergabe-Bereitschaftszustand versetzt wird, wenn der erste Aufzeichnungsträger in die Wiedergabeeinheit (120) geladen ist, wobei der Wiedergabe-Bereitschaftszustand auf der Basis des Steuersignals, welches den Abschluß der Vorbereitung zum Aufzeichnen zeigt, gelöscht wird, um die Wiedergabe des ersten Aufzeichnungsträgers zu beginnen.
13. Aufzeichnungs- und Wiedergabeverfahren nach Anspruch 12,
wobei die Aufzeichnungseinheit (130) in den Aufzeichnungs-Bereitschaftszustand versetzt wird und das Steuersignal ausgibt, welches den Abschluß der Vorbereitung zum Aufzeichnen zeigt, wenn der zweite Aufzeichnungsträger in die Aufzeichnungseinheit (130) geladen ist, wobei der Aufzeichnungs-Bereitschaftszustand der Aufzeichnungseinheit (130) durch die Wiedergabesignale gelöscht wird, die von der Wiedergabeeinheit (120) geliefert werden, um die Wiedergabesignale von der Wiedergabeeinheit (120) auf dem zweiten Aufzeichnungsträger aufzuzeichnen.

14. Aufzeichnungs- und Wiedergabeverfahren nach Anspruch 13,
wobei nach Beendigung der Wiedergabe des ersten Aufzeichnungsträgers durch die Wiedergabeeinheit (120) die Aufzeichnungseinheit (130) die Verwaltungsinformation der Informationssignale, die auf dem Aufzeichnungsbereich aufgezeichnet sind, auf dem Verwaltungsinformationsbereich des zweiten Aufzeichnungsträgers aufzeichnet.
15. Aufzeichnungs- und Wiedergabeverfahren nach Anspruch 14,
wobei die Wiedergabe des ersten Aufzeichnungsträgers durch die Wiedergabeeinheit (120) beendet wird, wenn das Aufzeichnen der Informationssignale auf dem zweiten Aufzeichnungsträger durch die Aufzeichnungseinheit (130) während der Wiedergabe des ersten Aufzeichnungsträgers durch die Wiedergabeeinheit (120) beendet wird.
16. Aufzeichnungs- und Wiedergabeverfahren nach einem der Ansprüche 11 bis 15, wobei das Verfahren Operationen zum Wechseln des ersten Aufzeichnungsträgers der Wiedergabeeinheit (120) und zum Laden eines anderen ersten Aufzeichnungsträgers wiederholt, um die Wiedergabeeinheit (120) in einen Wiedergabe-Bereitschaftszustand zu versetzen, während der zweite Aufzeichnungsträger der Wiedergabeeinheit (130) gewechselt wird und ein anderer zweiter Aufzeichnungsträger geladen wird, um die Aufzeichnungseinheit (130) in einen Aufzeichnungs-Bereitschaftszustand nach Beendigung der Aufzeichnung eines der zweiten Aufzeichnungsträger durch die Aufzeichnungseinheit (130) zu versetzen, wobei der Wiedergabe-Bereitschaftszustand der Aufzeichnungseinheit (120) auf der Basis des Steuersignals, welches den Abschluß der Vorbereitung zum Aufzeichnen der Aufzeichnungseinheit (130) zeigt, gelöscht wird, um mit der Wiedergabe des anderen ersten Aufzeichnungsträgers zu beginnen und um die Wiedergabesignale von der Wiedergabeeinheit (120) auf dem anderen zweiten Aufzeichnungsträger durch die Aufzeichnungseinheit (130) aufzuzeichnen.
17. Aufzeichnungs- und Wiedergabeverfahren nach einem der Ansprüche 11 bis 16,
wobei die Wiedergabesignale des ersten Aufzeichnungsträgers, welche durch die Wiedergabeeinheit (120) wiedergegeben werden, durch die Aufzeichnungseinheit (130) auf jedem der zweiten Aufzeichnungsträger, welche im zweiten Unterbringungsabschnitt (134a) untergebracht sind, aufgezeichnet werden.
18. Aufzeichnungs- und Wiedergabeverfahren nach einem der Ansprüche 11 bis 17,
wobei spezifizierte Informationssignale von

5 einem der ersten Aufzeichnungsträger durch die Wiedergabeeinheit (120) wiedergegeben werden, wobei die wiedergegebenen spezifizierten Informationssignale auf dem zweiten Aufzeichnungsträger durch die Aufzeichnungseinheit (130) aufgezeichnet werden, wobei die Aufzeichnungseinheit (130) in den Aufzeichnungs-Bereitschaftszustand nach Beendigung der Wiedergabe der spezifizierten Informationssignale des einen ersten Aufzeichnungsträgers durch die Wiedergabeeinheit (120) versetzt wird, wobei der eine erste Aufzeichnungsträger durch einen anderen ersten Aufzeichnungsträger durch den ersten Transportmechanismus (124b) ausgetauscht wird, um spezifizierte Informationssignale des anderen ersten Aufzeichnungsträgers durch die Wiedergabeeinheit (120) wiedergeben, wobei der Aufzeichnungs-Bereitschaftszustand der Aufzeichnungseinheit (130) gelöscht wird, um die spezifizierten Informationssignale auf dem zweiten Aufzeichnungsträger aufzuzeichnen.

Revendications

- 25 1. Appareil d'enregistrement et de reproduction comprenant :
- 30 une unité de reproduction (120) comportant un premier support d'enregistrement (65) chargé sur elle et adaptée pour reproduire un premier support d'enregistrement ; et
- 35 une unité d'enregistrement (130) adaptée pour enregistrer des signaux d'information qui sont reproduits au moyen de l'unité de reproduction (120) sur un second support d'enregistrement,
- 40 dans lequel :
- l'unité d'enregistrement (130) applique un signal de commande sur l'unité de reproduction ; et
- 45 l'unité de reproduction (120) démarre la reproduction du premier support d'enregistrement sur la base du signal de commande qui est appliqué depuis l'unité d'enregistrement (130) et applique des signaux reproduits sur l'unité d'enregistrement (130),
- 50 caractérisée en ce que :
- 55 le signal de commande qui est appliqué depuis l'unité d'enregistrement (130) sur l'unité de reproduction (120) indique la fin de la préparation pour enregistrer les signaux d'information sur le second support d'enregistrement,
- dans lequel

l'unité de reproduction (120) est établie dans un état d'attente de reproduction lorsque le premier support d'enregistrement est chargé dessus, l'unité de reproduction (120) ayant son état d'attente de reproduction qui est libéré sur la base du signal de commande qui indique la fin de la préparation pour un enregistrement de manière à démarrer une reproduction du premier support d'enregistrement ; et l'unité d'enregistrement (130) est établie dans un état d'attente d'enregistrement et elle émet en sortie le signal de commande qui indique la fin de la préparation pour l'enregistrement lorsque le second support d'enregistrement est chargé dessus, l'unité d'enregistrement (130) ayant son état d'attente d'enregistrement qui est libéré par les signaux reproduits qui sont appliqués depuis l'unité de reproduction (120) de manière à enregistrer les signaux reproduits en provenance de l'unité de reproduction (120) sur le second support d'enregistrement.

2. Appareil d'enregistrement et de reproduction selon la revendication 1, dans lequel l'unité de reproduction (120) comporte une pluralité de premiers supports d'enregistrement qui sont chargés sur elle et est adaptée pour reproduire de façon séquentielle l'un de la pluralité de premiers supports d'enregistrement chargés.
3. Appareil d'enregistrement et de reproduction selon la revendication 1 ou 2, dans lequel l'unité d'enregistrement (130) comporte une pluralité de seconds supports d'enregistrement enregistrables chargés sur elle dont chacun comporte une zone d'enregistrement qui peut enregistrer des signaux d'information dedans et une zone d'information de gestion dans laquelle une information de gestion incluant au moins une table d'information de contenu des signaux d'information enregistrés dans la zone d'enregistrement est enregistrée, l'unité d'enregistrement (130) étant adaptée pour enregistrer des signaux d'information et une information de gestion sur l'un de la pluralité de seconds supports d'enregistrement chargés.
4. Appareil d'enregistrement et de reproduction selon l'une quelconque des revendications précédentes, dans lequel l'unité d'enregistrement (130) enregistre l'information de gestion des signaux d'information enregistrés dans la zone d'enregistrement dans la zone d'information de gestion du second support d'enregistrement après la fin de la reproduction du premier support d'enregistrement au moyen de l'unité de reproduction (120).
5. Appareil d'enregistrement et de reproduction selon l'une quelconque des revendications précédentes,

5 dans lequel l'unité de reproduction (120) termine la reproduction du premier support d'enregistrement lorsque l'enregistrement des signaux d'information sur le second support d'enregistrement au moyen de l'unité d'enregistrement (130) est terminé pendant la reproduction du premier support d'enregistrement.

6. Appareil d'enregistrement et de reproduction selon l'une quelconque des revendications précédentes, 10 dans lequel l'unité de reproduction (120) comporte une première section de boîtier (124a) pour loger la pluralité de premiers supports d'enregistrement chargés dessus et un premier mécanisme de transport (124b) pour extraire l'un des premiers supports d'enregistrement à partir de la première section de boîtier (124a) et pour transporter le premier support d'enregistrement jusqu'à l'unité de reproduction (120), et l'unité d'enregistrement (130) comporte une seconde section de boîtier (134a) pour loger la pluralité de seconds supports d'enregistrement chargés dessus et un second mécanisme de transport (134b) pour extraire l'un des seconds supports d'enregistrement à partir de la seconde section de boîtier (134a) et pour transporter le second support d'enregistrement jusqu'à l'unité d'enregistrement (130) de telle sorte qu'après la fin de la reproduction du premier support d'enregistrement au moyen de l'unité de reproduction (120) ou qu'après la fin de l'enregistrement des signaux d'information sur le second support d'enregistrement au moyen de l'unité d'enregistrement (130), le premier support d'enregistrement reproduit au moyen de l'unité de reproduction (120) soit ramené à la première section de boîtier (124a) par le premier mécanisme de transport (124b) tandis que le second support d'enregistrement enregistré au moyen de l'unité d'enregistrement (130) est ramené à la seconde section de boîtier (134a) au moyen du second mécanisme de transport (134b).
7. Appareil d'enregistrement et de reproduction selon la revendication 6, dans lequel l'unité d'enregistrement (130) enregistre l'information de gestion des signaux d'information enregistrés dans la zone d'enregistrement dans la zone d'information de gestion du second support d'enregistrement avant que le second support d'enregistrement ne soit ramené à la seconde section de boîtier par le second mécanisme de transport (134b) de telle sorte que le second support d'enregistrement soit ramené à la seconde section de boîtier (134a) au moyen du second mécanisme de transport (134b) après la fin de l'enregistrement de l'information de gestion.
8. Appareil d'enregistrement et de reproduction selon la revendication 6 ou 7, l'appareil repétant des opérations constituées par un échange du premier sup-

- port d'enregistrement au moyen du premier mécanisme de transport (124b) afin d'établir l'unité de reproduction (120) dans un état d'attente de reproduction tout en échangeant le second support d'enregistrement au moyen du second mécanisme de transport (134b) afin d'établir l'unité d'enregistrement (130) dans un état d'attente d'enregistrement après la fin de l'enregistrement de l'un des seconds supports d'enregistrement au moyen de l'unité d'enregistrement (130), par le fait d'avoir l'état d'attente de reproduction qui est libéré sur la base du signal de commande qui indique la fin de la préparation pour l'enregistrement de l'unité d'enregistrement (130) de manière à démarrer la reproduction du premier support d'enregistrement, et par un enregistrement des signaux reproduits en provenance de l'unité de reproduction (120) sur le second support d'enregistrement au moyen de l'unité d'enregistrement (130).
9. Appareil d'enregistrement et de reproduction selon l'une quelconque des revendications 6 à 8, dans lequel les signaux reproduits du premier support d'enregistrement qui est reproduit au moyen de l'unité de reproduction (120) sont enregistrés par l'unité d'enregistrement (130) sur chacun des seconds supports d'enregistrement qui sont logés dans la seconde section de boîtier (134a).
10. Appareil d'enregistrement et de reproduction selon l'une quelconque des revendications 6 à 9, dans lequel des signaux d'information spécifiés de l'un des premiers supports d'enregistrement sont reproduits par l'unité de reproduction (120), les signaux d'information spécifiés reproduits étant enregistrés sur le second support d'enregistrement par l'unité d'enregistrement (130), l'unité d'enregistrement (130) étant établie dans l'état d'attente d'enregistrement après la fin de la reproduction des signaux d'information spécifiés du premier support d'enregistrement considéré par l'unité de reproduction (120), le premier support d'enregistrement considéré étant échangé contre un autre premier support d'enregistrement par le premier mécanisme de transport (124a) afin de reproduire des signaux d'information spécifiés de l'autre premier support d'enregistrement au moyen de l'unité de reproduction (120), l'état d'attente d'enregistrement de l'unité d'enregistrement (130) étant libéré afin d'enregistrer les signaux d'information spécifiés sur le second support d'enregistrement.
11. Procédé d'enregistrement et de reproduction en utilisant une unité de reproduction (120) pour reproduire l'un d'une pluralité de premiers supports d'enregistrement qui sont logés dans une première section de boîtier (124a) et sur lesquels des signaux d'information sont enregistrés, et une unité d'enregistrement (130) pour enregistrer les signaux d'information qui sont reproduits par l'unité de reproduction (120) sur l'un de seconds supports d'enregistrements enregistrables qui sont logés dans une seconde section de boîtier (134a) et dont chacun comporte une zone d'enregistrement permettant d'enregistrer des signaux d'information dedans et une zone d'information de gestion comportant enregistrée sur elle une information de gestion qui inclut au moins une table d'information de contenu des signaux d'information qui sont enregistrés dans la zone d'enregistrement, le procédé comprenant les étapes de :
- 15 extraction de l'un des premiers supports d'enregistrement à partir de la première section de boîtier (124a), chargement du premier support d'enregistrement considéré sur l'unité de reproduction (120) et établissement de l'unité de reproduction (120) dans un état d'attente de reproduction pour le premier support d'enregistrement chargé ; et
- 20 extraction de l'un des seconds supports d'enregistrement à partir de la seconde section de boîtier (134a), chargement du second support d'enregistrement considéré sur l'unité d'enregistrement (130), établissement de l'unité d'enregistrement (130) dans un état d'attente d'enregistrement pour le second support d'enregistrement chargé et émission en sortie d'un signal de commande qui indique la fin d'une préparation pour l'enregistrement,
- 25 dans lequel l'unité de reproduction (120) démarre la reproduction du premier support d'enregistrement sur la base du signal de commande qui indique la fin d'une préparation pour l'enregistrement, lequel signal est appliqué depuis l'unité d'enregistrement (130), et applique des signaux reproduits sur l'unité d'enregistrement (130) tandis que l'unité d'enregistrement (130) enregistre les signaux reproduits appliqués dessus sur le second support d'enregistrement.
- 30
- 35
- 40
- 45
12. Procédé d'enregistrement et de reproduction selon la revendication 11, dans lequel l'unité de reproduction (120) est établie dans l'état d'attente de reproduction lorsque le premier support d'enregistrement est chargé sur l'unité de reproduction (120), l'état d'attente de reproduction étant libéré sur la base du signal de commande qui indique la fin d'une préparation pour l'enregistrement de manière à démarrer la reproduction du premier support d'enregistrement
- 50
- 55
13. Procédé d'enregistrement et de reproduction selon la revendication 12, dans lequel l'unité d'enregistrement (130) est établie dans l'état d'attente d'enre-

- gistrement et émet en sortie le signal de commande qui indique la fin d'une préparation pour l'enregistrement lorsque le second support d'enregistrement est chargé sur l'unité d'enregistrement (130), l'unité d'enregistrement (130) ayant l'état d'attente d'enregistrement qui est libéré par les signaux reproduits qui sont appliqués depuis l'unité de reproduction (120) de manière à enregistrer les signaux reproduits en provenance de l'unité de reproduction (120) sur le second support d'enregistrement.
14. Procédé d'enregistrement et de reproduction selon la revendication 13, dans lequel, après la fin de la reproduction du premier support d'enregistrement au moyen de l'unité de reproduction (120), l'unité d'enregistrement (130) enregistre l'information de gestion des signaux d'information enregistrés dans la zone d'enregistrement dans la zone d'information de gestion du second support d'enregistrement.
15. Procédé d'enregistrement et de reproduction selon la revendication 14, dans lequel la reproduction du premier support d'enregistrement au moyen de l'unité de reproduction (120) est terminée lorsque l'enregistrement des signaux d'information sur le second support d'enregistrement au moyen de l'unité d'enregistrement (130) est terminé pendant la reproduction du premier support d'enregistrement au moyen de l'unité de reproduction (120).
16. Procédé d'enregistrement et de reproduction selon l'une quelconque des revendications 11 à 15, le procédé répétant des opérations constituées par un échange du premier support d'enregistrement de l'unité de reproduction (120) et par un chargement d'un autre premier support d'enregistrement afin d'établir l'unité de reproduction (120) dans un état d'attente de reproduction tout en échangeant le second support d'enregistrement de l'unité d'enregistrement (130) et en chargeant un autre second support d'enregistrement afin d'établir l'unité d'enregistrement (130) dans un état d'attente d'enregistrement après la fin de l'enregistrement de l'un des seconds supports d'enregistrement au moyen de l'unité d'enregistrement (130), par le fait d'avoir l'état d'attente de reproduction de l'unité de reproduction (120) qui est libéré sur la base du signal de commande qui indique la fin d'une préparation pour l'enregistrement de l'unité d'enregistrement (130) de manière à démarrer la reproduction de l'autre premier support d'enregistrement, et par le fait d'enregistrer les signaux reproduits en provenance de l'unité de reproduction (120) sur l'autre second support d'enregistrement au moyen de l'unité d'enregistrement (130).
17. Procédé d'enregistrement et de reproduction selon l'une quelconque des revendications 11 à 16, dans lequel les signaux reproduits du premier support d'enregistrement qui est reproduit par l'unité de reproduction (120) sont enregistrés par l'unité d'enregistrement (130) sur chacun des seconds supports d'enregistrement qui sont logés dans la seconde section de boîtier (134a).
18. Procédé d'enregistrement et de reproduction selon l'une quelconque des revendications 11 à 17, dans lequel des signaux d'information spécifiés de l'un des premiers supports d'enregistrement sont reproduits par l'unité de reproduction (120), les signaux d'information spécifiés reproduits étant enregistrés sur le second support d'enregistrement par l'unité d'enregistrement (130), l'unité d'enregistrement (130) étant établie dans l'état d'attente d'enregistrement après la fin de la reproduction des signaux d'information spécifiés du premier support d'enregistrement considéré par l'unité de reproduction (120), le premier support d'enregistrement considéré étant échangé contre un autre premier support d'enregistrement par le premier mécanisme de transport (124b) afin de reproduire des signaux d'information spécifiés de l'autre premier support d'enregistrement au moyen de l'unité de reproduction (120), l'état d'attente d'enregistrement de l'unité d'enregistrement (130) étant libéré afin d'enregistrer les signaux d'information spécifiés sur le second support d'enregistrement.

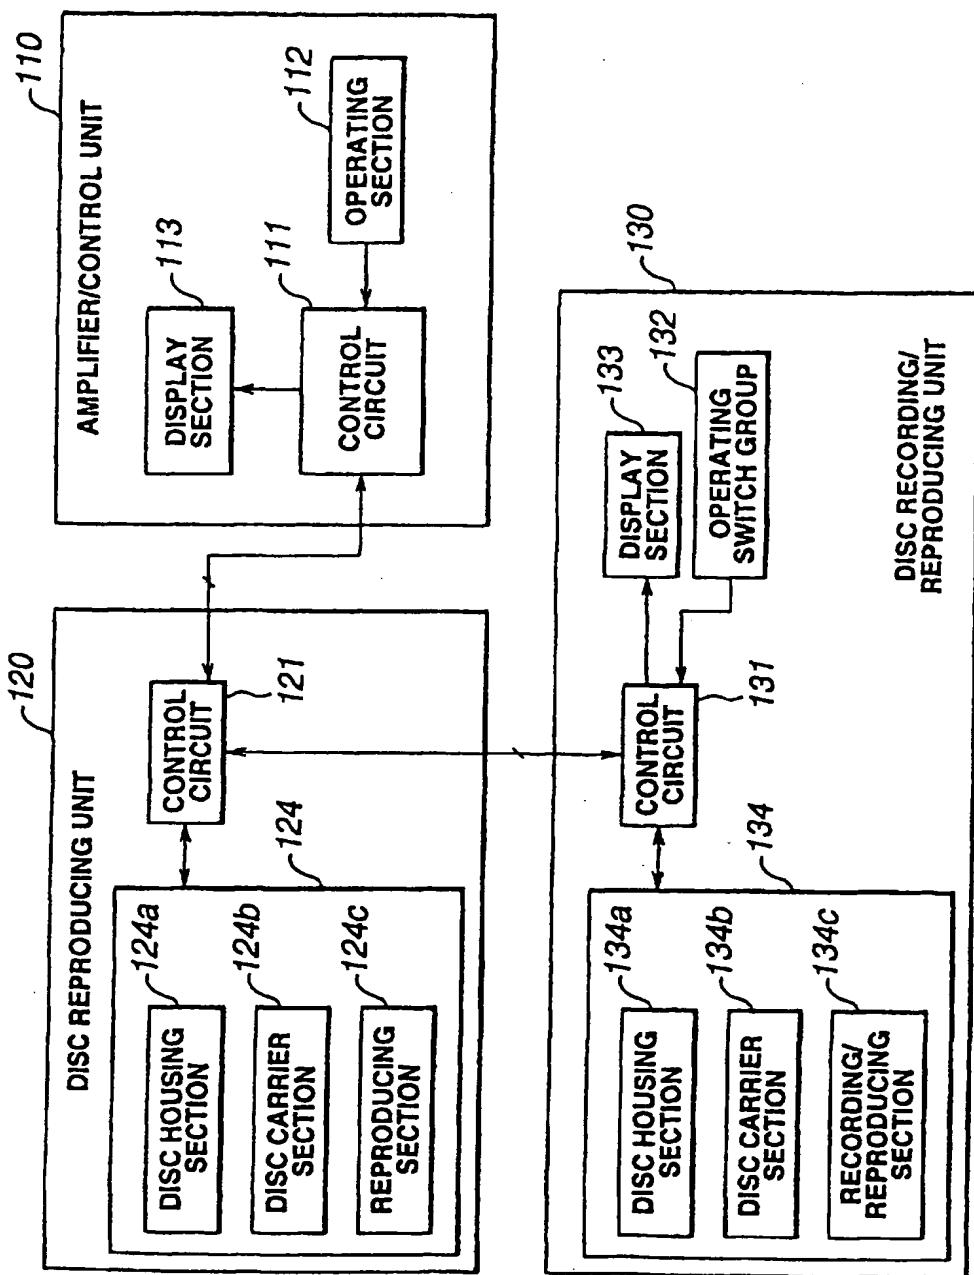


FIG.1

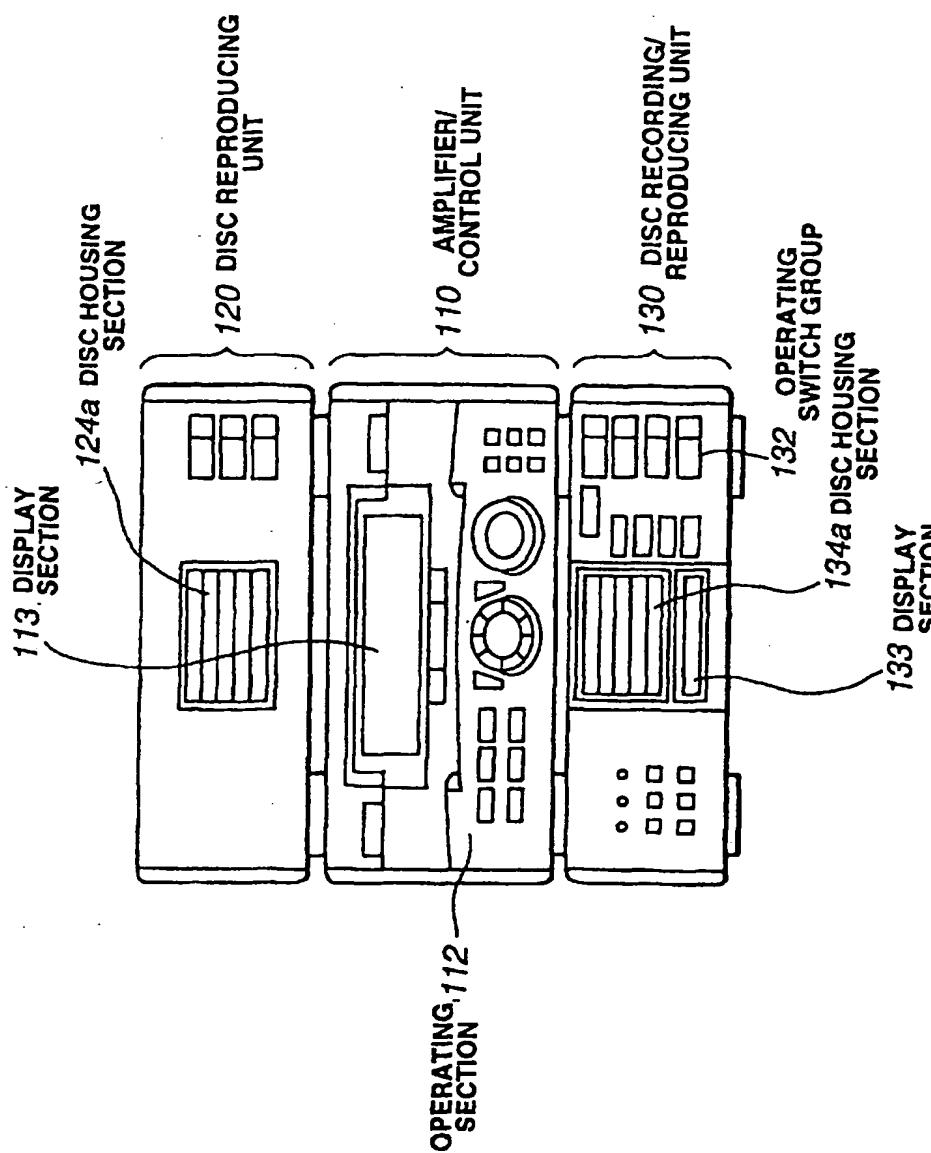


FIG.2

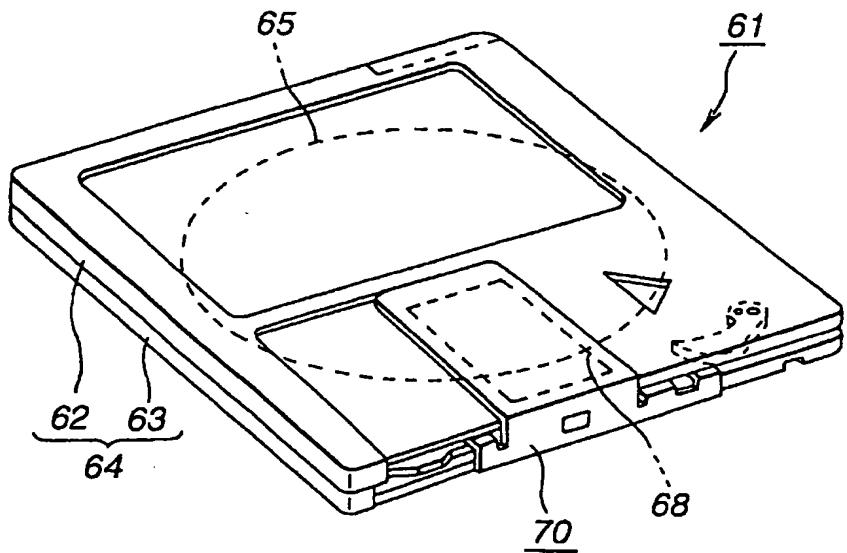


FIG.3(a)

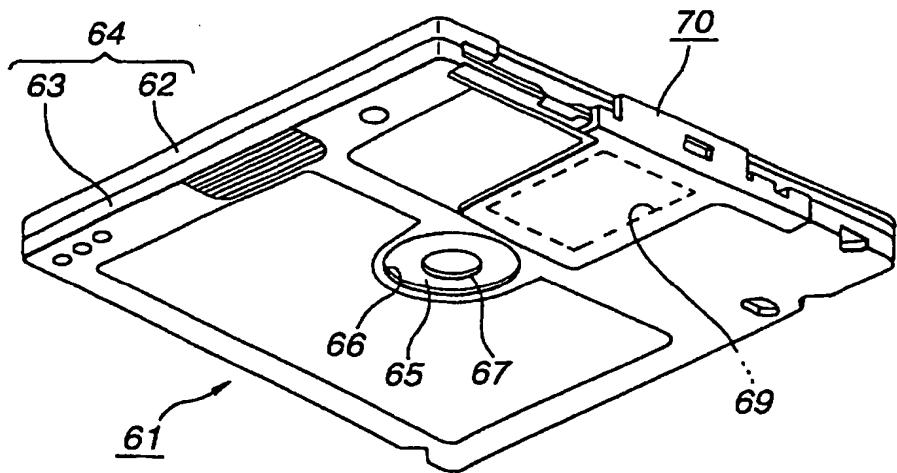


FIG.3(b)

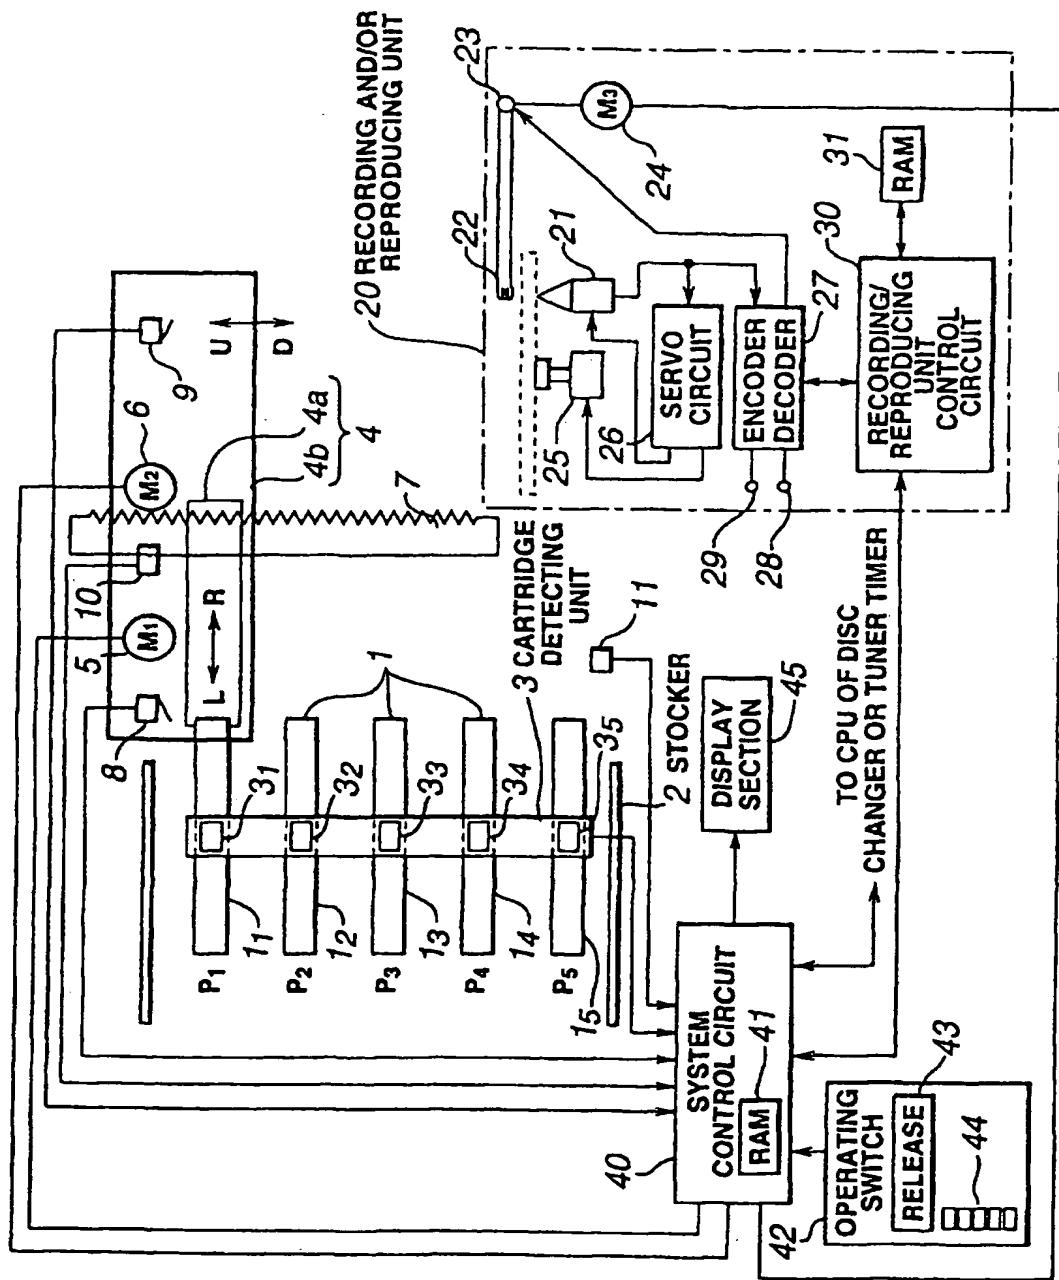


FIG.4

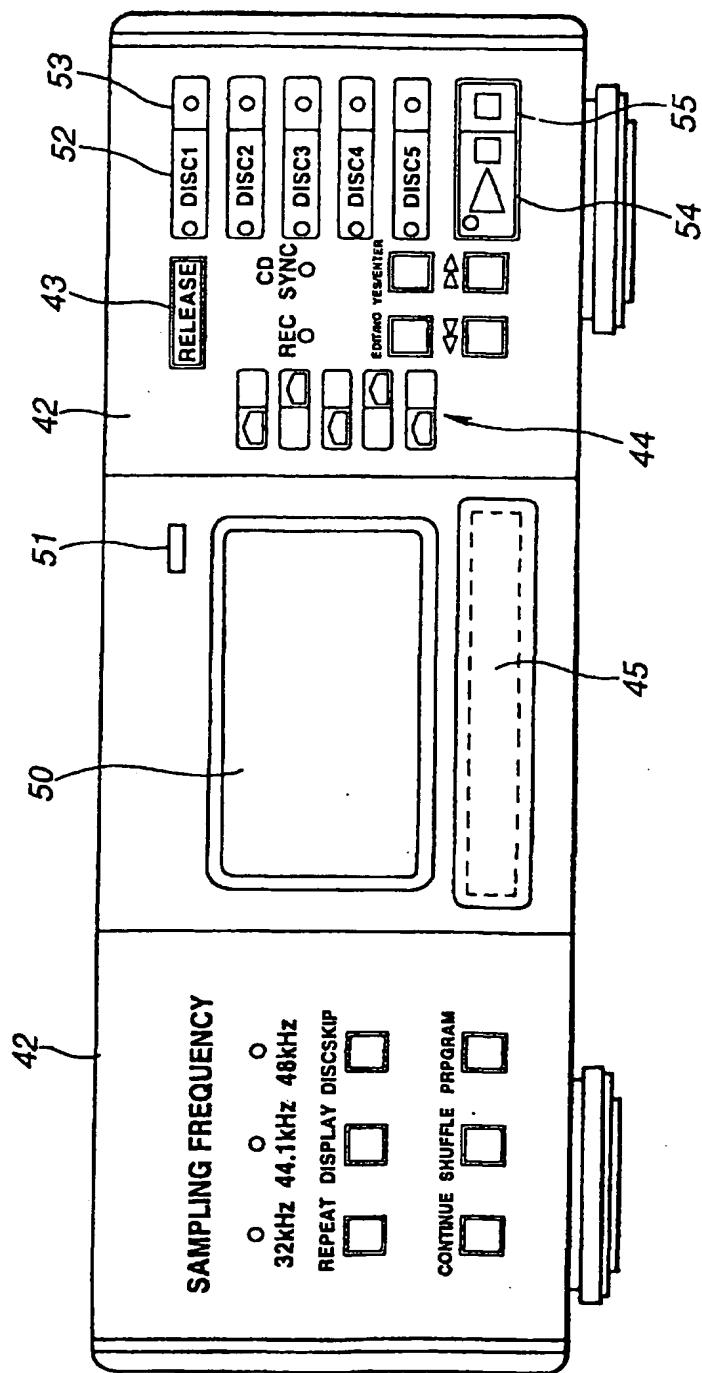


FIG.5

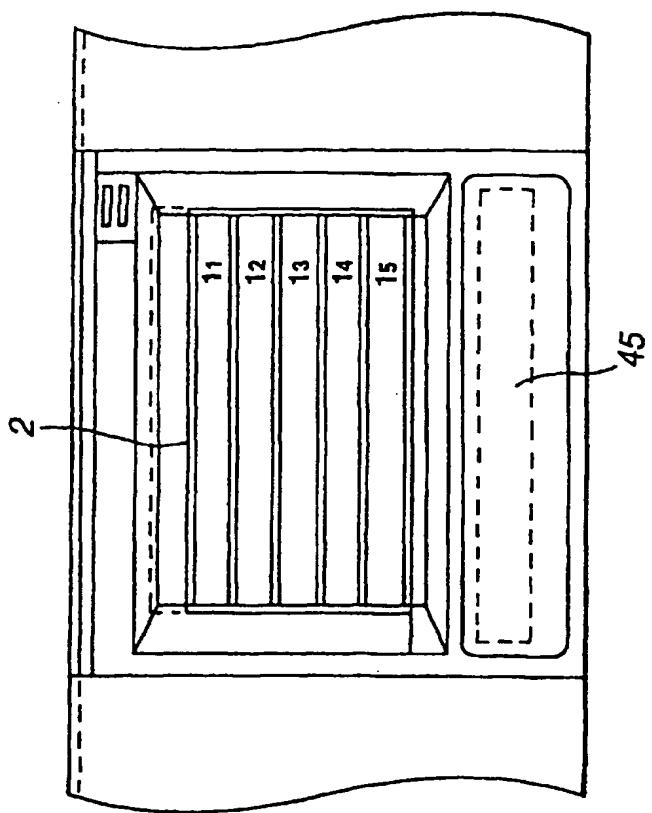
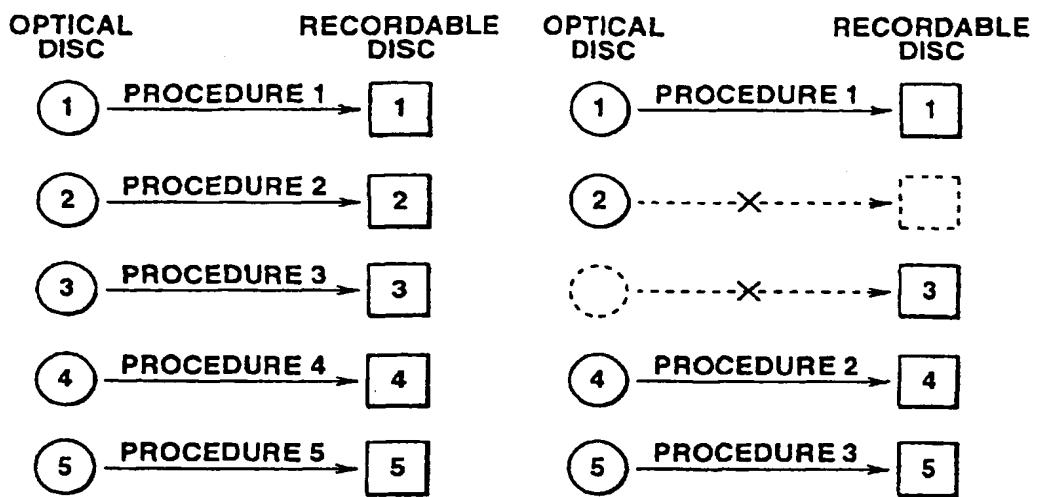


FIG.6



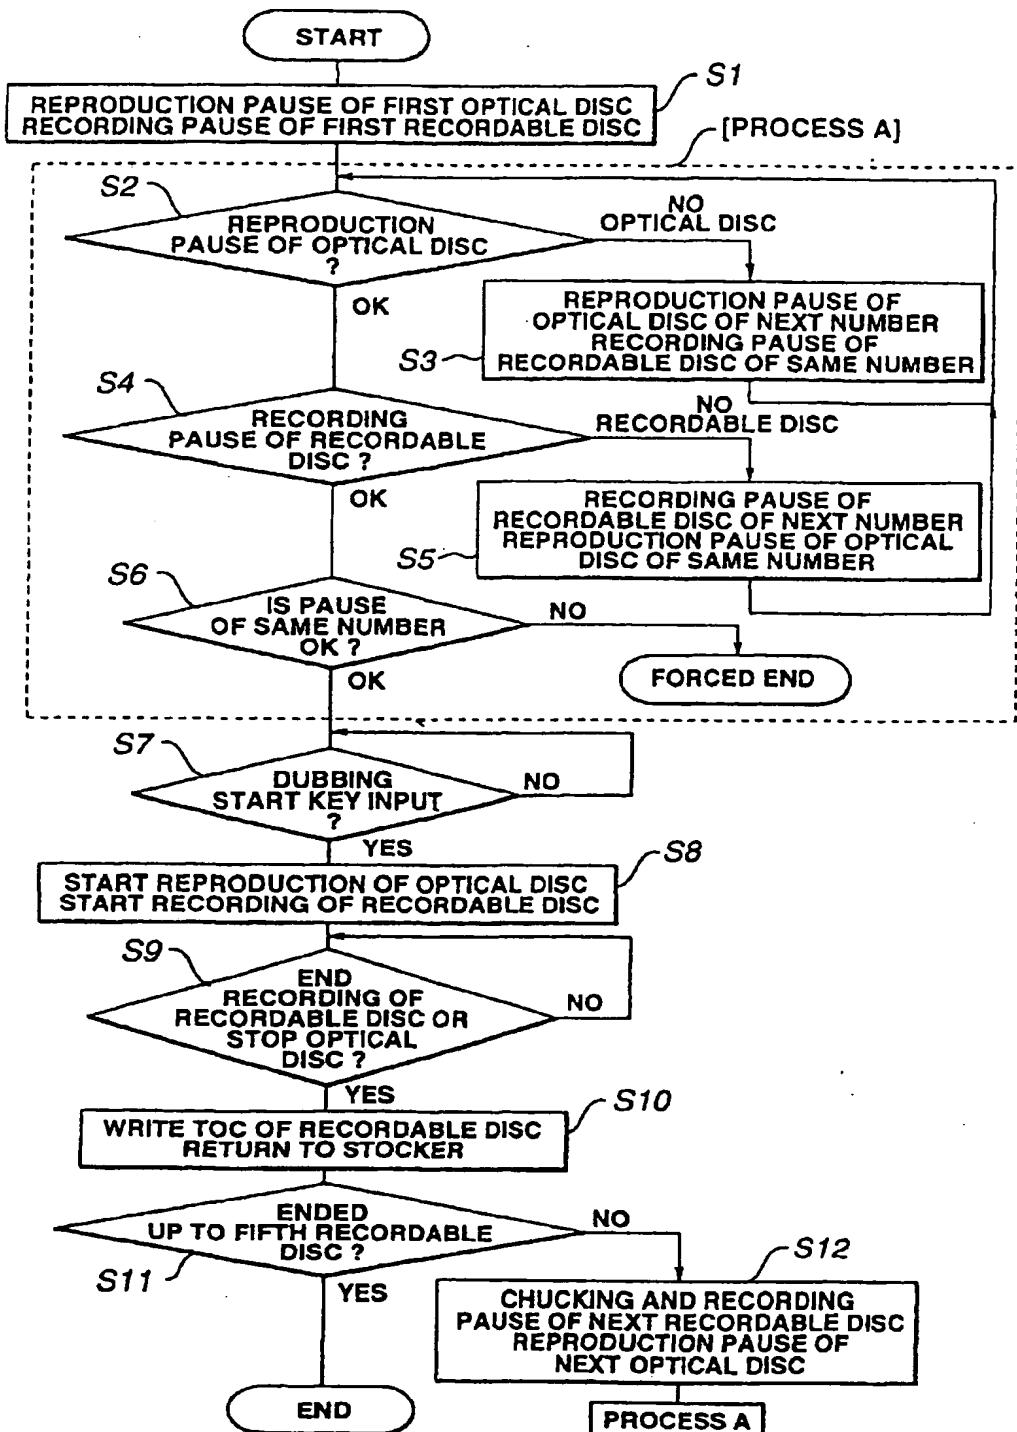


FIG.8

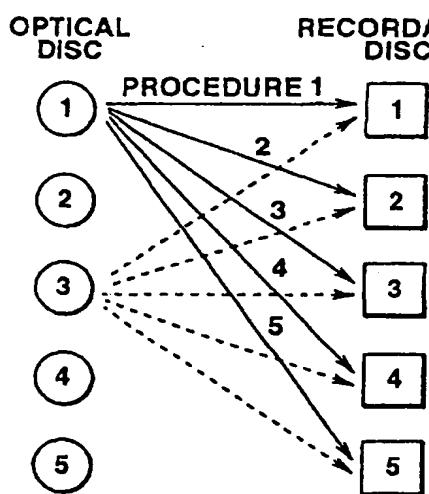


FIG.9(a)

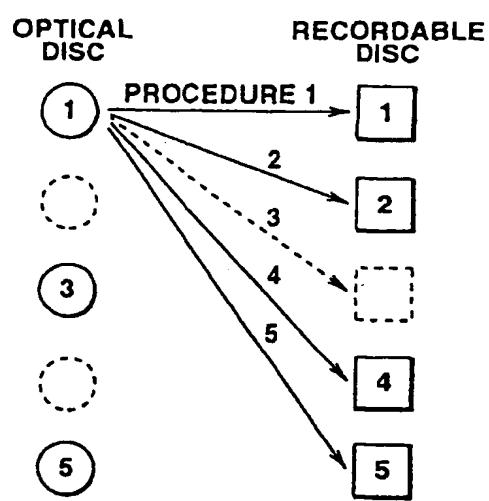


FIG.9(b)

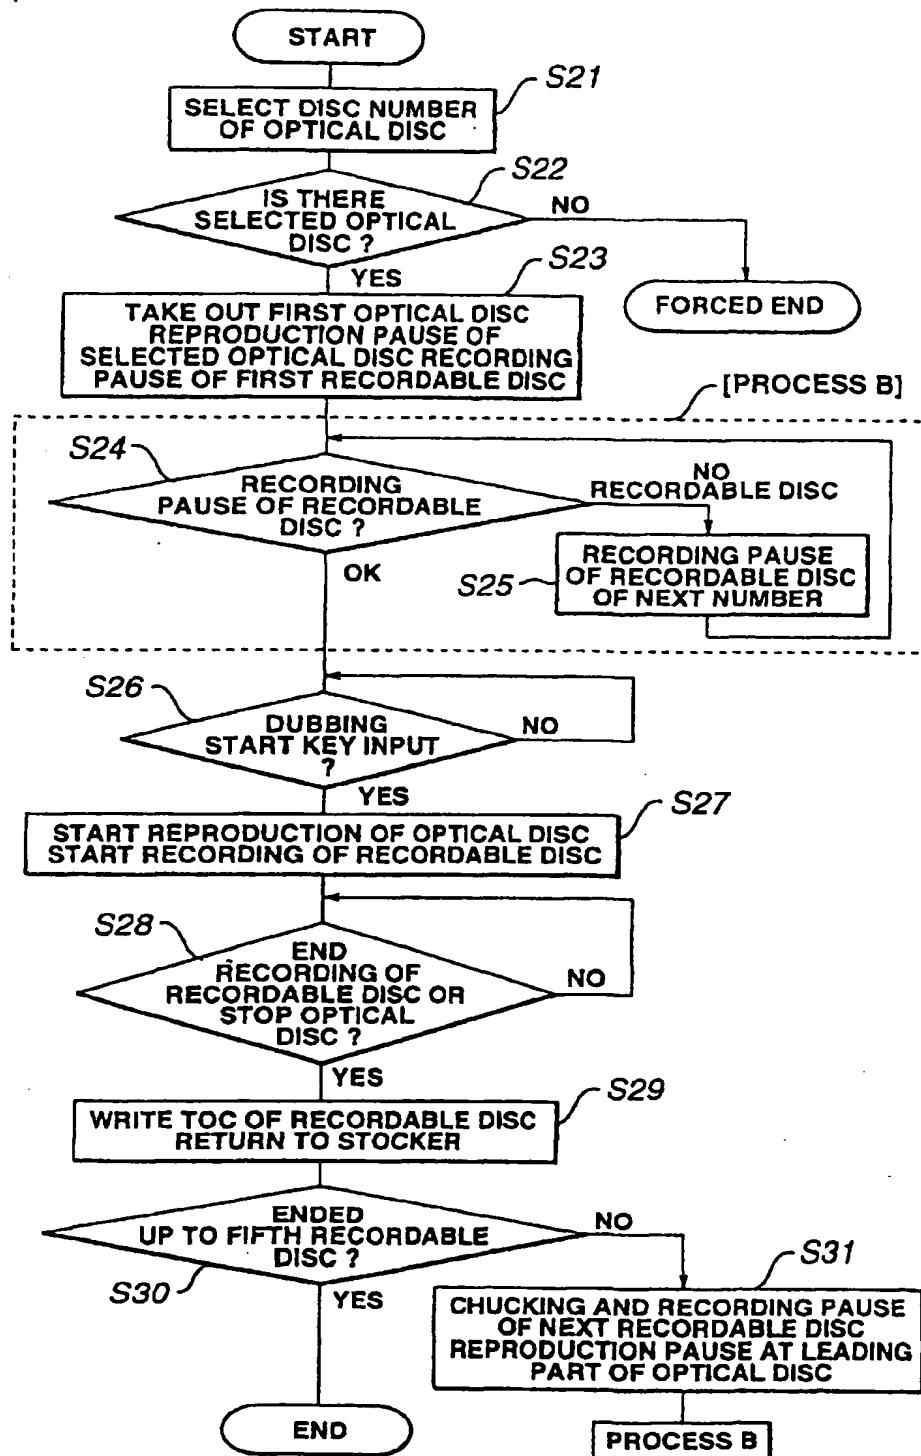


FIG.10

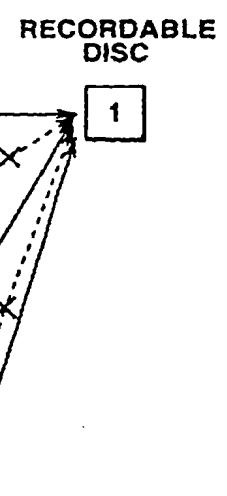
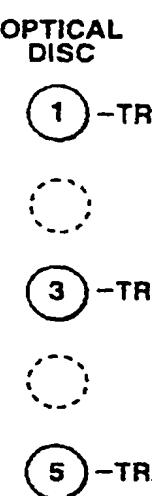
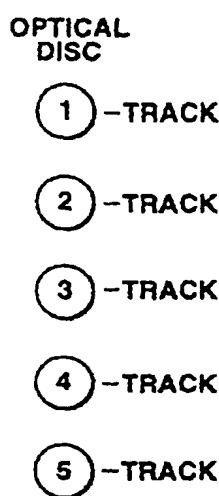


FIG.11(a)

FIG.11(b)